

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 867 394 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**30.10.2002 Bulletin 2002/44**

(51) Int Cl.7: **B65H 29/40**

(21) Application number: **98302029.8**

(22) Date of filing: **18.03.1998**

(54) **Sheet reversing apparatus**

Bogenwendeapparat

Appareil pour retourner des feuilles

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **24.03.1997 JP 6940597**  
**24.12.1997 JP 35510497**

(43) Date of publication of application:  
**30.09.1998 Bulletin 1998/40**

(73) Proprietor: **KONICA CORPORATION**  
**Tokyo (JP)**

(72) Inventors:  
• **Hirota, Kazuhiro**  
**Hachioji-shi, Tokyo (JP)**  
• **Hosoya, Hisao**  
**Hachioji-shi, Tokyo (JP)**  
• **Endo, Satoru**  
**Hachioji-shi, Tokyo (JP)**  
• **Kanazawa, Yuji**  
**Musashino-shi, Tokyo (JP)**

- **Yoshida, Takanori**  
**Toda-shi, Saitama-ken (JP)**
- **Omi, Kazuyoshi**  
**Kawageo-shi, Saitama-ken (JP)**
- **Tomotsune, Mamoru**  
**Yokohama-shi, Kanagawa-ken (JP)**
- **Kawano, Masanobu**  
**Hachioji-shi, Tokyo (JP)**
- **Nishimoto, Yukihiro**  
**Akiruno-shi, Tokyo (JP)**

(74) Representative: **Rees, Alexander Ellison et al**  
**Urquhart-Dykes & Lord,**  
**30 Welbeck Street**  
**London W1G 8ER (GB)**

(56) References cited:  
**US-A- 5 026 036**                      **US-A- 5 114 135**  
**US-A- 5 261 655**                      **US-A- 5 692 740**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 867 394 B1**

## Description

### BACKGROUND OF THE INVENTION

[0001] The present invention relates to a sheet finishing apparatus which receives sheets delivered from an image forming apparatus or the like, and reverses the sheets by a reversing means.

[0002] Conventionally, in the case where a sheet (hereinafter, also called a recording sheet) on which an image has been formed by an image forming apparatus such as a copier, printer, or the like, is successively delivered and stacked with an image facing upward, initially the first page sheet is delivered when an original is recorded from the first page, and the sheets are successively delivered in page order, and therefore the second page recording sheet is delivered on the first page recording sheet. Accordingly, the page order of the recording sheets is disordered, and it takes a long time to finish the sheets so that the sheets are aligned in page order. Accordingly, a recording sheet reversing device is provided by which the sheets are successively delivered with the image facing downward and aligned in page order, by reversing the recording sheet delivered from the image forming apparatus by a reversing means.

[0003] As the recording sheet reversing device, Japanese Patent Publication Open to Public Inspection Nos. 267260/1991, 750/1993, 70018/1993, 53252/1996, 85662/1996, 85663/1996, etc., are disclosed.

[0004] A guide slot is provided to insert the leading edge of the recording sheet, conveyed by a conveying roller after the recording sheet has been delivered from the image forming apparatus, into a drum-like formed recording sheet reversing means, and the recording sheet reversing means is reversed after the leading edge of the delivered recording sheet has been inserted into the guide slot.

[0005] For example, Japanese Patent Publication Open to Public Inspection No. 267260/1991 is structured such that a guide slot is formed on a reversing disk body; the recording sheet is conveyed by a conveying roller pair; and the leading edge of the recording sheet is inserted into the guide slot. When the recording sheet is inserted, the reversing disk body is stopped, however, when the leading edge of the recording sheet is inserted into the narrow guide slot, it can not be smoothly inserted if the leading edge of the recording sheet has any curve or bend.

[0006] The guide slot is formed into a long curve along the reversing disk body. In a thin recording sheet, there is a case where, because it has a smaller stiffness, it is bent on the way, and can not be inserted to a predetermined depth. In this case, because the recording sheet is held by the guide slot, the recording sheet is dropped out of the guide slot when the reversing disk body is reversed, and a recording sheet reversing operation can not be smoothly carried out. Specifically, when the re-

versing operation is carried out at a higher speed, a provability becomes higher in which the recording sheet is dropped out of the guide slot, and the reversing operation can not efficiently be carried out. Reversely, in the case of the thick recording sheet with high stiffness, there is a problem in which it can hardly be inserted into the guide slot.

[0007] Further, Japanese Patent Publication Open to Public Inspection No. 53252/1996 is structured such that a long receiving slot is provided to insert the recording sheet into a disk unit which is reversing-operated; and the leading edge of the recording sheet is inserted into the disk unit and the sheet is reversely conveyed. Next, when the disk unit is rotated and a reciprocating boss member is moved to a lower position, it is dropped downward by gravity, and presses the recording sheet in the receiving slot. In this structure also, because the leading edge of the recording sheet is inserted into the long receiving slot, in also the case of the thin recording sheet, in the same manner as described above, the sheet is bent on the way due to the lower stiffness of the recording sheet, or reversely, in the case of the thick recording sheet with higher stiffness, the recording sheet is hardly inserted into the guide slot, which are problems. Further, in the reciprocating boss member to hold the recording sheet in the receiving slot, the recording sheet inserted into the receiving slot of the disk unit is not held when the reciprocating boss member is not moved to the lower position, and during the reverse conveyance, the recording sheet is only inserted simply into the receiving slot, and thereby the recording sheet is easily dropped out of the receiving slot.

[0008] A further recording sheet reversing device, considered to represent the closest prior art, is shown in United States Patent No. US-A-5026036. This reversing device is formed by a rotating drum having gripping means able to selectively close and open to grip and release a recording sheet and arranged to rotate at a constant speed to reverse the recording sheet.

[0009] Another recording sheet reversing device is shown in United States Patent No. US-A-5261655. This receiving device is formed by a rotating drum having recording sheet receiving slots and arranged to rotate at a constant speed to reverse the recording sheet.

### Summary of the Invention

[0010] The present invention is specifically considered to solve the above problems. That is, the object of the present invention is to securely hold the recording sheet by the sheet reversing means and reversely convey the sheet, even when a condition of curvature or thickness of the leading edge of the recording sheet is different. Further object is to securely reverse the recording sheet even when the size of the recording sheet is different.

[0011] The object of the present invention is attained by a sheet finishing apparatus for receiving a sheet on

which an image has been formed by an image forming apparatus and for ejecting the sheet after a front side thereof is reversed, the sheet finishing apparatus comprising:

(a) a sheet conveying means for conveying the sheet fed from the image forming apparatus downstream;

(b) a sheet reversing means for receiving the sheet conveyed by the sheet conveying means, and for reversing the front side of the sheet by rotation;

(c) a sheet stopping means for blocking a leading edge portion of the sheet to be stopped at a position where the front side of the sheet is reversed by rotating the sheet reversing means;

(d) a sheet stacking means for stacking the sheet separated from the sheet reversing means by a further rotation of the sheet reversing means after the leading edge portion of the sheet is blocked by the sheet stopping means; and characterised by further comprising

(e) a control means for controlling the sheet conveying means and the sheet reversing means,

wherein after the control means drives the sheet conveying means and the sheet reversing means substantially at a same first conveyance speed to convey the leading edge portion of the sheet, when a conveyance angle of the sheet reversing means reaches a predetermined rotation angle, the control means controls the sheet conveying means and the sheet reversing means to increase conveyance linear speeds thereof, and then drives the sheet conveying means at a second conveyance speed higher than the first conveyance speed, while driving the sheet reversing means at the first conveyance speed, thereby a trailing portion of the sheet is conveyed to form a buckle of the sheet due to a difference in conveyance speed between the sheet reversing means and the sheet conveying means so that the sheet is separated from the sheet reversing means when the sheet is reversed.

[0012] Preferred embodiments of the invention are disclosed in claims 2-30.

#### Brief Description of the Drawings

[0013]

Figure 1 is a front view in which a sheet finishing apparatus of the present invention is connected to an image forming apparatus.

Fig. 2 is a perspective view showing an outline structure of the sheet finishing apparatus of the present invention.

Fig. 3 is a side view of the sheet finishing apparatus of the present invention.

Fig. 4 is a front view showing a sheet reversing drum of the sheet finishing apparatus of the present invention.

Fig. 5 is a front view showing a sheet reversing drum of the sheet finishing apparatus of the present invention.

Fig. 6 is a front view showing an operation sequence of a sheet reversing drum of the sheet finishing apparatus of the present invention.

Fig. 7 is a front view showing the next operation sequence of a sheet reversing drum of the sheet finishing apparatus of the present invention.

Fig. 8 is a front view showing the next operation sequence of a sheet reversing drum of the sheet finishing apparatus of the present invention.

Fig. 9 is a control block diagram showing the control of the sheet finishing apparatus of the present invention.

Fig. 10 is a time chart showing the control of the sheet finishing apparatus of the present invention.

Fig. 11 is a flow chart showing the control of the sheet finishing apparatus of the present invention.

Fig. 12 is a view showing the sheet conveyance path from an image forming section to a reverse sheet delivery tray.

Fig. 13 is a sectional view under the sheet receiving condition of the sheet finishing apparatus shown in Fig. 12.

Fig. 14 is a sectional view under the sheet reversing condition of the sheet finishing apparatus shown in Fig. 12.

Fig. 15 is a sectional view of a reversing drum in the sheet finishing apparatus shown in Fig. 12.

Fig. 16 is a time chart showing operations of the reversing drum, a conveying roller, etc., at the time of reverse conveyance of a small sized sheet.

Fig. 17 is a time chart showing operations of the reversing drum and the conveying roller, at the time of reverse conveyance of a middle sized sheet.

Fig. 18 is a time chart showing operations of the reversing drum and a conveying roller, at the time of reverse conveyance of a large sized sheet.

Fig. 19 is a view showing the sheet conveyance condition before reversing.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0014] Fig. 1 is a front view in which an image forming apparatus 100 such as a copier, or the like, is connected to a sheet finishing apparatus 200 of the present invention.

[0015] The image forming apparatus 100 is composed of an image forming section 101 and a plurality of sheet feeding sections 102 provided below the image forming section 101, and further, an automatic docu-

ment feeding device 103 is located on the image forming section 101. A recording sheet P is fed from the sheet feeding section at the same time when the document is sent from the automatic document feeding device 103 by the start of the image forming apparatus 100, and after an image is transferred onto the fed recording sheet from the image forming section 101, the recording sheet is delivered by a pair of sheet delivery rollers 104 which deliver the fixed recording sheet P. The recording sheet P is detected by a sheet sensor S for sheet delivery at the time of sheet delivery, and it is confirmed that the recording sheet P is delivered from the image forming apparatus 100.

**[0016]** Next, the recording sheet P is sent to a sheet finishing apparatus 200. When the document is copied from the final page using the automatic document feeding device 103, the sheet is delivered by ordinary sheet delivery operations from a delivery sheet conveying section 309 onto a sheet delivery tray 205 provided on a frame 300.

**[0017]** The apparatus is structured as follows. In the case where the page order of the recording sheet P is not correct when a plurality of documents are copied from the first page, and delivered without any additional operation, the recording sheet P is fed by being switched to a conveyance section for reversing 202, conveyed by a conveying roller pair 203, which is a sheet conveyance means; next, the leading edge of the recording sheet P is held by a sheet reversing drum 201, which is a sheet reversing means, and is reversed; next, after the recording sheet P is stopped by a sheet stopping member 204, the sheet stopping member 204 is driven by a driving member 218; and the recording sheet P is delivered onto a reversed sheet delivery tray 206.

**[0018]** The above description is made for the overall structure in which the sheet finishing apparatus 200 is connected to the image forming apparatus 100, and the concrete structure of the sheet finishing apparatus 200 of the present invention will be described below.

**[0019]** Fig. 2 is a perspective view showing an outline structure of the sheet reversing drum 201 and the sheet stopping member 204 in the sheet finishing apparatus 200.

**[0020]** One conveying roller of the conveying roller pair 203 is fixed on a drive shaft 223, the drive shaft 223 is rotatably provided in a frame 300 in Fig. 1, and a driving gear G4 is fixed on its one end. In order to reverse the recording sheet P delivered from the image forming apparatus 100, the recording sheet P nipped by the conveying roller pair 203, is sent to the sheet reversing drum 201, which is formed into the drum-shape, with the leading edge of the recording sheet P in the lead, and is detected by a sensor S1.

**[0021]** The sheet reversing drum 201 is fixed on a shaft 207, the shaft 207 is rotatably provided in the frame 300 constituting the sheet reversing drum 201, a gear G1 is fixed on one end of the shaft 207, and the sheet reversing drum 201 is rotated counterclockwise through

a reduction gear G driven by the driving motor M, and the shaft 207 together with the gear G1. Further, a rotating cutout plate 209 to control the rotation of the sheet reversing drum 201 is provided on the end of the shaft 207, and a sheet reversing drum sensor 210 is provided to detect the rotating cutout plate 209.

**[0022]** The sheet reversing drum 201 is fixed by the shaft 207 so that the drum 201 is located at almost central portion of the recording sheet P conveyed by the conveying roller pair 203. Further, in order to hold the leading edge of the conveyed recording sheet P, a sheet holding means, which can be opened and closed, is provided at a position of the peripheral portion of the sheet reversing drum 201. A movable sheet holding means 400 is rotatably provided so that it is opened in the direction of reception of the recording sheet P which is fed and conveyed, and the recording sheet P is held by the close of the movable sheet holding means 400. A fixed sheet holding member 401 fixed on the sheet reversing drum 201 is provided opposing the movable sheet holding member 400. The movable sheet holding member 400 and the fixed sheet holding member 401 are provided so that the recording sheet P is nipped and held between these members.

**[0023]** Further, sheet conveyance members 215 and 216 for receiving the leading edge of the recording sheet P sent by the conveying roller pair 203, are fixedly provided on a shaft 2130 close to both sides in the direction of the rotating shaft of the sheet reversing drum 201, at a position above the shaft 207 of the sheet reversing drum 201. A driving gear G3 driven by a conveying motor M1 is provided being interlocked with a gear G2 provided on one end of the shaft 213 in order to drive the gear G2, so that the sheet conveyance members 215 and 216 are rotated clockwise. Further, a pair of driven rollers 213 and 214 which contact with the sheet conveyance members 215 and 216, are provided through spring members 307 and 308, which are respectively fixed on a supporting plate 301 provided in the frame 300. Like this, the sheet conveyance member 215 and the driven roller 213, and the sheet conveyance member 216 and the driven roller 214 are respectively paired with each other, and are provided close to both sides of the sheet reversing drum 201 as described above.

**[0024]** The recording sheet P is nipped by the movable sheet holding member 400 and the fixed sheet holding member 401, the sheet reversing drum 201 is rotated, and sheet guiding members 211 and 212 to simultaneously guide both sides of the recording sheet P when the drum 201 is rotated, are formed along the peripheral portion in the rotational direction of circumference of the sheet reversing drum 201, and are fixed on the supporting plate 301.

**[0025]** When the sheet reversing drum 201 is rotated with the shaft 207 counterclockwise and the recording sheet P is reverse-conveyed, the recording sheet P is guided onto the sheet stacking member 302 provided in the frame 300 under the condition that the recording

sheet P is reversed. Open grooves 305 and 306 are formed on the sheet stacking member 302 on which the recording sheet P is stacked, and a sheet blocking member 204A formed of 2 members, integrated with the sheet stopping member 204, which is a sheet stopping means, is protruded from the open grooves 305 and 306. Further, the sheet stopping member 204 is moved through a connecting rod 217, a crank 218 is rotated by the driving means, and the sheet blocking member 204A is stopped at a predetermined position of the sheet stacking member 302.

[0026] The recording sheet P is reverse-conveyed under this condition, and the leading edge of the recording sheet P is blocked by the sheet blocking member 204. On the other hand, because the sheet reversing drum 201 is continuously rotated, the recording sheet P, under a nipped condition, is separated from the movable sheet holding member 400 and the fixed sheet holding member 401. The recording sheet P is stopped under a stacked condition at a position at which the sheet blocking member 204A is stopped on the sheet stacking member 302. After reverse-conveyance of a plurality of recording sheets P has been completed, finishing processing such as stapling or the like is conducted as necessary, and the sheet blocking member 204A is moved in the direction of sheet delivery and the stapled recording sheets P is delivered onto the reverse sheet delivery tray 206.

[0027] In this connection, the sheet detecting member S1, driving motors M, M1, and the detecting means 210 to detect a rotating cutout plate 209, are respectively connected to a control device C and controlled. In the control device C, as shown by a control block diagram in Fig. 9, a reverse driving circuit C1 and a reverse control circuit C2 for the sheet reversing drum 201, are provided. In the reverse control circuit C2, an angular counting circuit C3 for the sheet reversing drum 201 is provided.

[0028] Numerals 221 and 222 are sheet position regulating members to determine positions for conveyance and delivery, when the recording sheet P is reverse-conveyed by the sheet reversing drum 201 or delivered from the sheet stacking member 302 onto the reverse sheet delivery tray 206, and the sheet position regulating members are moved along guiding slots 303, 304 in the direction perpendicular to the advancing direction of the recording sheet.

[0029] The structure of the sheet finishing apparatus 200 of the present invention was described by the perspective view as above, and further, the structure viewed from the side will be described below.

[0030] Fig. 3 is a side view of the sheet finishing apparatus, which shows the sheet reversing drum and the sheet stopping member.

[0031] The sheet reversing drum 201 fixed on the shaft 207 is arranged almost vertically, as shown in the drawing, and sheet guiding members 211 and 212 are fixed on the supporting plate 301 through a few amount

of gaps 201A and 201B on both sides of the sheet reversing drum 201. The movable sheet holding member 400 is rotatably provided on a supporting shaft 402, in a hole 404 provided in one portion in the circumferential direction of the sheet reversing drum 201, and is opposite to a fixed sheet holding member 401 fixed on the sheet reversing drum 201. Further, a moving roller 403 is integrally provided on the movable sheet holding member 400, and comes into contact with a cam 309 provided on the supporting plate 301. This system is opened and closed on the side on which the recording sheet P is inserted, between the movable sheet holding member 400 and the fixed sheet holding member 401.

[0032] When the sheet reversing drum is rotated, the moving roller 403 of the movable sheet holding member 400 comes into contact with the cam 309, and stops and stands ready at a position at which a gap between the movable sheet holding member 400 and the fixed sheet holding member 401 is opened. Two portions of the leading edge of the recording sheet P are conveyed by respectively paired sheet conveyance members 215, 216 and driven rollers 213, 215, and the central portion of the 2 portions of the leading edge is conveyed into a gap between movable sheet holding member 400 and the fixed sheet holding member 401, and advanced.

[0033] Next, when the sheet reversing drum 201 is rotated, the moving roller 403 of the movable sheet holding member 400 is separated from the cam 309 and is closed, and the central portion of the leading edge of the recording sheet P is nipped between the movable sheet holding member 400 and the fixed sheet holding member 401 for reverse-conveyance. As described in Fig. 2, the leading edge of the reverse-conveyed recording sheet P is blocked by the sheet blocking member 204A of the sheet stopping member 204, and the recording sheet P is stacked on the sheet stacking member 302.

[0034] Sheet position regulating members 221 and 222 provided on the sheet stacking member 302 are provided on wire driving means Y1 and Y2 driven by driving motors M2 and M3. When the rotation of the driving motors M2 and M3 is controlled, the sheet position regulating members 221 and 222 are moved in the direction of the width of the recording sheet P, and further, the sheet delivery position is determined.

[0035] Further, staplers ST and ST1 to conduct stapling, which is a sheet finishing process, when a plurality of recording sheets P are reverse-delivered, are provided at the position of sheet stacking member 302. Although not shown in the drawing, the staplers ST and ST1 are movable to a predetermined position corresponding to the size of the recording sheet P.

[0036] The main structure of the sheet finishing apparatus 200 of the present invention was described referring to Figs. 2 and 3. The control and operation sequence of the recording sheet reversing operations of the sheet finishing apparatus 200 will be described below.

[0037] Figs. 4, 5, 6, 7, and 8 are front views of the

sheet reversing drum 201 which reverses the sheet P, in the sheet finishing apparatus 200 of the present invention, and are illustrations of reversing operation sequence which reverses the conveyed recording sheet P.

[0038] Fig. 9 is a control block diagram to control the sheet finishing apparatus 200.

[0039] Fig. 10 is a time chart of the recording sheet reversing control sequence. Fig. 11 is a flow chart of the recording sheet reversing control sequence.

[0040] A conveying roller pair 203 is integrally provided with a reversing conveyance section 202, and is provided on the leading edge of an arm 311 provided on a shaft 313 fixed in the sheet finishing apparatus 200. The arm 311 is supported by a rotation cam 312, and the recording sheet receiving portion of the reversing conveyance section 202 is held at a sheet delivery position of the image forming apparatus 100. When recording sheet P jamming occurs in the image forming apparatus 100, or during ordinary sheet delivery, rotation cam 312 is operated, and the reversing conveyance section 202 is dropped downward together with the arm 311, and the recording sheet P is delivered onto the sheet delivery tray 205 shown in Fig. 1.

[0041] The movable sheet holding member 400 is provided such that it is always in pressure-contact with the fixed sheet holding member 401 by an elastic member SP as shown in the drawing. Further, in holes 409, 410 formed in the peripheral portion of the sheet reversing drum 201, a sheet movement member 405 is supported by each shaft 406. A sheet contacting member 407 having some elasticity is fixed on one end of the outside of the sheet movement member 405 so that it directly contacts with the recording sheet P to move the recording sheet P.

[0042] A weight 408 is provided on the inside of the other end of the sheet movement member 405, and when the sheet movement member 405 is moved to the upper position during rotation of the sheet reversing drum 201, the sheet movement member 405 is accommodated in the holes 409 and 410, together with the sheet contacting member 407 by the weight 408. As the sheet movement member is moved downward, the sheet contacting member 407 is moved from the inside of the holes 409 and 410 to the outside by the weight 408, and the leading edge of the reversed recording sheet P comes into contact with the sheet blocking member 204A, which is in a predetermined position, so that the recording sheet P is aligned.

[0043] The sheet reversing drum 201 shown in Fig. 4 is under the condition before the recording sheet P is delivered from the image forming apparatus 100, and is ready for reversing the recording sheet P to be delivered, and the sheet reversing drum 201 is stopped at this position. The movable sheet holding member 400 is stopped at the upper position of the sheet reversing drum 201, in the position at which the movable sheet holding member 400 passed the vertical line D3-D4 as shown in the drawing.

[0044] During such a ready condition, when the moving roller 403 of the movable sheet holding member 400 comes into contact with the cam 309 at the upper position of the stopped sheet reversing drum 201, the movable sheet holding member 400 is separated from the fixed sheet holding member 401 against the elastic member SP, and a gap between them is opened in the conveyance direction of the recording sheet P, so that the recording sheet P can be inserted. Next, the sheet movement member 405 which passed the horizontal line D1-D2 and further moved to the upper position, is moved into the hole 410 by the weight 408. On the other hand, the sheet movement member 405 which is rotated from a position before the line D3-D4 at the lower position, is moved outside the hole 410 by the weight 408, and is stopped at a position at which it passed the line D3-D4 in the lower position.

[0045] Next, image processing has been completed in the image forming apparatus 100, the recording sheet P is delivered by the sheet delivery roller 104, and the recording sheet P is detected by the sheet detecting member S1, thereby, the driving control of the sheet reversing drum 201 is started.

[0046] Referring to a flow chart in Fig. 11, and a time chart in Fig. 10, the operation sequence of Figs. 5, 6, 7, and 8 will be described below.

[0047] By the start of the step F1, a power source of the conveying motor M1 is turned ON at the step F2, the drive of the conveying motor M1 is started at a low speed, and the recording sheet P is conveyed by the conveying roller pair 203 in the reverse-conveying section 202 shown in Fig. 5. Gears G2 and G4 are rotated clockwise through the driving gear G3 by the start of the drive, and paired sheet conveying members 215, 216 and driven rollers 213 and 214 are rotated at a low speed in the direction of conveyance of the recording sheet P. When the recording sheet P is conveyed by the conveying roller pair 203 in the direction of the sheet reversing drum 201, the recording sheet P is detected by the sheet sensor S1, and it is judged at the step F3 whether the sheet sensor S1 is ON.

[0048] In the case where the sheet sensor S1 is judged to be ON when the recording sheet P is conveyed, a timer T1 starts at the step F4, and after the timer T1 is operated as shown in the time chart in Fig. 10, it is judged at the step F5 whether the timer T1 has counted up.

[0049] At that time, as shown in Figs. 4 and 5, the movable sheet holding member 400, provided on the sheet reversing drum 201, is separated from the fixed sheet holding member 401 by the action of the cam 309, and stopped under the condition that the leading edge of the recording sheet P enters these members. When it is judged that the timer T1 has counted up, the driving motor M of the sheet reversing drum 201 is turned ON at the step F6, and the sheet reversing drum 201 is rotated at a low speed, as shown by the time chart.

[0050] In this case, the conveyance speed (210 mm/

sec) of the recording sheet P by the sheet conveying members 215 and 216 and the driven rollers 213 and 214, coincides with the rotational peripheral speed of the sheet reversing drum 201.

[0051] Next, as shown in Fig. 6, by the rotational movement of the sheet reversing drum 201, the operation roller 403 of the sheet holding member 400 is separated from the cam 309, the movable sheet holding member 400 is closed by the elastic member SP, and the leading edge of the recording sheet P is held between the movable sheet holding member 400 and the fixed sheet holding member 401.

[0052] As described above, the sheet reversing drum 201 is rotated from the position of line D3-D4, which is the initial starting position, to the position of line D1-D2, together with the movable sheet holding member 400. At the step F7, the rotational angle of the sheet reversing drum 201 is counted by an angle counting circuit C3 shown in Fig. 9, and it is judged whether the sheet reversing drum 201 is rotated to the first rotational angle of 90°.

[0053] When it is judged at the step F7 whether the sheet reversing drum 201 is rotated by the first rotational angle of 90°, a timer T2 starts at the step F8. As shown by the time chart, after the timer T2 is operated, it is judged at the step F9 whether the timer T2 has counted up.

[0054] When it is judged at the step F9 that the timer T2 has counted up, the speed of the conveying motor M1 of the sheet conveying member 215 and the driving motor M of the sheet reversing drum 201 are increased and are switched to high speed rotation at F10. As shown by the time chart, the recording sheet P is conveyed by the sheet conveying member 215 under the condition that the conveying motor M1 and driving motor M are rotated at a high speed, and the sheet reversing drum 201 conducts the reversing operation at a high speed. At this case, the conveyance speed of the sheet conveying members 215 and 216 is 630 mm/sec, and the peripheral speed of the sheet reversing drum 201 is also 630 mm/sec.

[0055] In this stage, it is judged at the step F11 whether the sheet reversing drum 201 is rotated with the movable sheet holding member 400 from the line D3-D4 position, which is the initial starting position, by 180°, and the movable sheet holding member 400 is rotated to a position lower than the line D3-D4, as shown in Fig. 7.

[0056] When the rotation angle of the sheet reversing drum 201 is counted by the angular counting circuit C3 shown in Fig. 9, and it is judged at the step F11 that the sheet reversing drum 201 is rotated to the second rotation angle of 180°, the speed of only the driving motor M of the sheet reversing drum 201 is reduced as shown by the time chart at the step F12. Accordingly, the speed of the sheet reversing drum 201 is reduced to the line speed of 210 mm/sec, which is a lower speed, and the conveyance speed of the held recording speed P is also reduced.

[0057] However, as shown by the time chart, the speed of the conveying motor M1 of the sheet conveying members 125 and 126 is not reduced, but the high speed rotation of the increased line speed of 630 mm/sec is continued, and the recording sheet P is conveyed by the sheet conveying members 125 and 126 at the higher speed. Accordingly, as shown in Fig. 7, the trailing edge portion of the recording sheet P is separated from the sheet reversing drum 201 surface, and is continuously conveyed being curved toward the side, and it is judged at the step F13 whether the trailing edge of the recording sheet P passes the sheet sensor S1.

[0058] When it is confirmed that the trailing edge of the recording sheet P passes the sheet sensor S1 and the sheet sensor S1 is turned OFF, the speed of the conveying motor M1 of the sheet conveying members 125 and 126 return to the initial low speed rotation at the step F14, and the sheet conveying members 125 and 126 is also rotated at the lower speed. Thus, the recording sheet P is reversed by the sheet reversing drum 201 and the sheet conveying members 125 and 126, the recording surface of the recording sheet P faces downward, and one or a plurality of recording sheets P are sequentially reversed and stacked in page order.

[0059] In this case, as shown in Fig. 8, the sheet stopping member 204 is moved to a stopping position of the recording sheet P by the crank 218, shown in Fig. 2, through the connecting rod 217, and the sheet blocking member 204A is stopped at a predetermined position in the open grooves 305 and 306. The sheet reversing drum 201, whose rotation speed returns to a lower speed, is continuously rotated, thereby, the leading edge of the recording sheet P comes into contact with the sheet blocking member 204A at a low speed, and only the recording sheet P slips from the movable sheet holding member 400 which moves integrally with the sheet reversing drum 201, and the fixed sheet holding member 401, and stops at the sheet blocking member 204A position, thereby, the reversed recording sheet P is tacked on the sheet stacking member 302.

[0060] In this connection, the movable sheet holding member 400 is structured such that the recording sheet P is held between the movable sheet holding member 400 and the fixed sheet holding member 401 by the elastic member SP, however, when the leading edge of the recording sheet P comes into contact with the sheet blocking member 204A and is blocked, the recording sheet P is held by the elastic pressure whose strength level is so appropriate that the recording sheet P is smoothly pulled out from the holding condition.

[0061] Next, the leading edge of the sheet contacting member 407 of a plurality of sheet movement members 405, provided on the sheet reversing drum 201, is moved in the direction of the sheet blocking member 204A by the rotation of the sheet reversing drum 201, and the sheet contacting member 407 drops from the holes 409 and 410 by the weight 408. When the leading edge of the sheet contacting member 407 is comes into

light contact with the recording sheet P surface, the leading edge of the recording sheet P is moved in the direction of the sheet blocking member 204A, and the leading edge of the recording sheet P securely comes into contact with the sheet blocking member 204A, thereby, the piled up recording sheets P are aligned. Passage of the sheet contacting member 407 through the recording sheet P surface, is made between two dotted lines shown in the driving motor M of the time chart in Fig. 10.

**[0062]** The sheet reversing drum 201 is rotated and the rotating cutout plate 209 provided on the shaft of the sheet reversing drum 201 is rotated a single turn, and it is judged at the step F15 whether the sheet reversing drum sensor 210 is ON. When it is judged that the sheet reversing drum sensor 210 is ON, the driving motor M of the sheet reversing drum 201 is stopped at the step F16, and T3 shown in the time chart is a stopping time of the sheet reversing drum 201.

**[0063]** Next, at the step F17, it is judged whether the recording sheet P is delivered from the image forming apparatus 100 to the sheet finishing apparatus 200. When the recording sheet P is not detected by the sheet sensor S of the image forming apparatus 100, and it is judged at the step F17 the sheet delivery of the recording sheet P has been completed, the conveying motor M1 stops, thereby, the sheet conveying members 215 and 216 is stopped, at the step F18, and operations of the sheet finishing apparatus are completed at the step F19.

**[0064]** Next, the recording sheet P is delivered in succession from the image forming apparatus 100 to the sheet finishing apparatus 200, the step F17 is NO, and the sequence returns to the step F3 in the flow chart, the recording sheet P is detected by the sheet sensor S1, and the recording sheet P is reversed.

**[0065]** Before the recording sheet P is reverse-conveyed to the position of sheet position regulating members 221 and 222, the sheet position regulating members 221 and 222 shown in Fig. 3 are moved to the position outside the size position of the recording sheet P through wire driving means Y1 and Y2, by the drive of the driving motors M2 and M3. In the description of this drive, the driving time of only the driving motor M2 (single side) is shown in the time chart.

**[0066]** Next, after the leading edge of the recording sheet P has passed through the position of sheet position regulating members 221 and 222, the sheet position regulating members 221 and 222 are moved to the inside direction of the recording sheet P, and the reversing position of the recording sheet P is regulated. Further, after the recording sheet P has been released once, the sheet position regulating members 221 and 222 are stopped, and a plurality of recording sheets P are aligned at the accurate reversing sheet delivery position on the sheet stacking member 302.

**[0067]** According to the present invention, the edge portion of the conveyed sheet is held by the sheet hold-

ing means, which can be opened and closed, provided on the rotational peripheral portion of the sheet reversing means, and when the sheet reversing means is rotated, the sheet is stopped by the sheet stopping means at the position at which the sheet is reversed. Accordingly, the edge portion of the sheet is securely held by the sheet holding means, and the sheet is separated at the accurate position by the sheet stopping means, thereby, the sheet reversing operation can be quickly and smoothly carried out.

**[0068]** According to the present invention, the edge portion of the conveyed sheet is held by the sheet holding means, which can be opened and closed, and which is provided on the rotational peripheral portion, and the sheet is stopped by the sheet stopping means at the position at which the sheet is reversed by the rotation of the sheet reversing means. Accordingly, the edge portion of the sheet is securely held by the sheet holding means, and the control means, by which the line speed of the sheet conveying means is increased more than that of the sheet reversing means, is provided so that reversing operation is controlled. Thereby, the sheet is quickly reversed, and is separated at an accurate position by the sheet stopping means, so that the sheet reversing operation can be quickly and smoothly carried out.

**[0069]** Different points of a sheet finishing apparatus of another example of the present invention will be mainly described below. The same numbered components as the preceding example have the same functions.

**[0070]** Fig. 12 shows the outline of the sheet conveyance path from an image forming section 101 to a reversed sheet delivery tray 206. The sheet P delivered from the image forming section 101 through a fixing roller 203 and a delivery sheet roller R2 of the image forming section 101, is supplied to the reversing drum 201 through conveying rollers 203, 215 and 216. The sheet P reversed by the reversing drum 201 is stacked on a stacking table 302, and is delivered onto the reversed sheet delivery tray 206 by the sheet delivery member 204. As the sheet sensor for the control in the sheet reverse conveyance, a sensor S provided in the sheet delivery section of the image forming section 101, a sensor S1 provided in the sheet conveying entrance of the sheet finishing apparatus 200, and a sensor S2 to detect the rotation of the reversing drum 201, the sensor S2 being provided at a position of 155° from an apex of the reversing drum 201, are used.

**[0071]** Further, in the same manner as the above described example, openings 303 and 304 which are perpendicular to the sheet conveying direction, are provided in the stacking table 302. Position regulating members 221 and 222 to set a sheet travelling position, that is, a position in the direction of width of the conveyance path, are protruded from these openings 303 and 304, and regulate the side position of the sheet P. As shown in Fig. 3, the position regulating members 221 and 222 are fixed on wires Y1 and Y2, driven by motors M2 and



M3, and are driven by the motors M2 and M3, and respectively moved in the openings 303 and 304.

**[0072]** Referring to Figs. 13 and 14, which are sectional views, the structure of the sheet finishing apparatus 200 will be described below.

**[0073]** Guiding plates 211 and 212 are provided on both sides of the reversing drum 201 with some gaps 201A and 201B between them. The cam 309 is fixed on the fixed supporting plate 301 in the gap 201A, and the operation roller 403 of the movable holding-member 400 comes into contact with the cam 309. The movable holding member 400 can be rotated around the shaft 402, and is pushed by the spring SP clockwise in Fig. 13. When the movable holding member 400 stands at a position shown in Fig. 13, the operation roller 403 runs on the cam 309, and stands at a position rotated counterclockwise against the pushing force of the spring SP, and the movable holding member 400 protrudes from the peripheral surface of the reversing drum 201. When the reversing drum 201 is rotated counterclockwise from a position shown in Fig. 13, and the operation roller 403 is separated from the cam 309, the movable holding member 400 is rotated clockwise by the pushing force of the spring SP, pressure-contacts with the fixed holding member 401, and can hold the leading edge of the sheet P.

**[0074]** When the reversing drum 201 is further rotated, and the leading edge of the sheet P reaches the lowest position as shown in Fig. 14, travelling of the leading edge of the sheet P is blocked by a stopping arm 204A. The reversing drum 201 is continuously rotated, receives the succeeding sheet P conveyed by the conveying roller 203, and the sheet P is reversed and successively stacked on the stacking table 302.

**[0075]** In the same manner as the above-described example shown in Fig. 3, the staplers ST and ST1 are provided on both sides in the direction of width of the sheet conveyance path, and are driven by a motor, not shown, and is moved corresponding to the size of the sheet. Stacked sheets P are stapled by staplers ST and ST1.

**[0076]** Delivery means 204 reciprocates in cutouts 305 and 306 provided in the stacking table 302 by the clank 218 rotated by a motor, not shown, and delivers the stacked and stapled sheets P on the stacking table 302 in the left direction shown in Figs. 13 and 14. Delivered sheets P are collected on the reverse sheet delivery tray 206. Other than staplers, other finishing devices, for example, a punch to punch a specific position of the sheet, or stapling device other than the stapler, etc., may also be provided.

**[0077]** Referring to Fig. 15, the structure of the reversing drum 201 will be detailed below.

**[0078]** A protruded portion 2011 having a guide surface which is higher than the peripheral surface of the drum (several mm higher than the peripheral surface of the drum), is formed at a position close to the movable holding member 400 on the upstream side of the mov-

able holding member 400, in the rotational direction of the drum, and the almost same protruded portion 2012 is formed at a position apart from the movable holding member 400. The protruded portion 2011 suppresses floating of the leading edge portion of the sheet P in the vicinity of the stopping arm 204A, and prevents the leading edge of the sheet P from floating and bending due to impact at stopping, and being disordered, when travelling of the sheet P is blocked by the stopping arm 204A.

**[0079]** As shown in Fig. 19, the height of a portion supported by the reversing drum 201 is different from that of portions nipped by a pair of the conveying roller 215 and the driven roller 213 and a pair of the conveying roller 216 and the driven roller 214. Thereby, the protruded portion 2012 provides wave-like bending to the conveying sheet P so that the sheet P has stiffness, thereby, the protruded portion 2012 enhances the straight advancing property of the sheet P, so that the sheet P can be securely reversed. The protruded portion 2011 may only press the leading edge portion of the sheet P, and therefore, its length L1 in the rotational direction may be comparatively short. However, it is necessary for the protruded portion 2012 to securely reverse various sizes of sheets. Accordingly, the length L2 in its rotational direction is comparatively long. That is, preferably  $L1 < L2$ .

**[0080]** Oscillation members 4051 and 4052, which are alignment means to align the sheet, are provided in the reversing drum 201. The oscillation member 4051 is rotatably provided on a shaft 4061, and has a portion protruded from the peripheral surface of the reversing drum 201. A weight 4081 is provided on the opposite side of the protruded portion. In the same manner, the oscillation member 4052 is rotatably provided on a shaft 4062, and a weight 4082 is provided on the opposite side of the protruded portion with the shaft 4062 between them. Numerals 4091A and 4091B are stoppers to limit the oscillation angle range of the oscillation member 4051, and numerals 4092A and 4092B are stoppers to limit the oscillation angle range of the oscillation member 4052.

**[0081]** The positional relationship of the oscillation member 4051 to the stopper 4091B and the positional relationship of the oscillation member 4052 to the stopper 4092B are set as follows. That is, as shown in Fig. 15, under the condition that the oscillation members 4051 and 4052 respectively contact with stoppers 4091B and 4092B, and the protruded portion is positioned in the extremely opened position, the stoppers 4091B and 4092B are formed in such a manner that angles  $\theta 1$  and  $\theta 2$ , formed between the protruded portions of the oscillation members 4051, 4052, and tangential lines on the peripheral surface of the reversing drum 201 at the protruded portions, have the relationship of  $\theta 1 > \theta 2$ . When the stoppers 4091B and 4092B are formed as described above, the sheet P is regulated comparatively strongly by the oscillation member 4051 which in-

initially acts upon the sheet P, the leading edge of the recording sheet comes into contact with the stopping arm 204A, and the regulation force of the oscillating member 4052 which acts successingly upon the sheet, is made comparatively weak. Thereby, the leading edge portion is not bent at the stopping arm 204A position, the leading edge of the sheet P is aligned, and the sheet P is stacked on the stacking table 302.

**[0082]** The oscillation members 4051 and 4052 operate as follows. In Fig. 15, when the oscillation members 4051 and 4052 stand at angular positions corresponding to 7 to 3 o'clock of the clock, both the weights 4081 and 4082 are positioned left with respect to shafts 4061 and 4062, provide moment to the oscillation members 4051 and 4052 so as to rotate the oscillation members 4051 and 4052 counterclockwise, the oscillation members 4051 and 4052 are respectively rotated counterclockwise, and contact portions 4071 and 4072 are in contact with the stoppers 4091B and 4092B, or in proximity to them.

**[0083]** According to the counterclockwise rotation of the reversing drum 201, the rotation moment generated by weights 4081 and 4082, is decreased, the oscillation members 4051 and 4052 are gradually closed, and rotated to the position at which these members form the surface, which coincides with the peripheral surface of the reversing drum. While oscillation members 4051 and 4052 are located at a position between about 11 and 6 o'clock of the clock, this condition, that is, the condition that the contact members 4071 and 4072 are in contact with stoppers 4091A and 4092A, and the oscillation members 4051 and 4052 are closed, is maintained. Corresponding to advancing of the rotation of the reversing drum, the oscillating members 4051 and 4052 are oscillated when weights 4081 and 4082 are moved from the right side of shafts 4061 and 4062 to the left side, and are quickly rotated counterclockwise, and protrude from the peripheral surface of the reversing drum 201. This protruding operation is carried out when the oscillation members 4051 and 4052 pass the position close to the stacking table 302, and the right end of sheet P contacts with the stopping arm 204A and is aligned while the sheet P is being pressed on the stacking table 302.

#### (Operation of the sheet finishing apparatus)

**[0084]** Next, referring to Fig. 12 and Figs. 16 to 19, operation of the above-described sheet finishing apparatus will be described below.

**[0085]** Fig. 16 is a time chart showing time variations of the conveyance speed of the reversing drum 201 and that of the conveying rollers 203, 215, and 216 in the case of size A4 transverse feeding, size B5 transverse feeding, and conveyance of small sized sheet such as size A5 sheet. The motor M starts at time t12 delayed by a constant delay time  $\Delta t$  from a point of time t11 at which the sensor S1, provided at an entry of the sheet

finishing apparatus 200, detects the leading edge of the sheet P, and the reversing drum 201 starts the rotation. At a point of time t13 when the conveyance speed of the reversing drum 201 reaches 210 mm/sec, it is further increased to 630 mm/sec, and maintained at constant speed. The delay time  $\Delta t$  is the time necessary for the leading edge of the sheet to reach from the sensor S2 to the apex of the reversing drum 201.

**[0086]** The initial conveyance speed 210 mm/sec of the reversing drum 201 is nearly equal to the conveyance speed in the image forming section 101, specifically, in the sheet delivery section. At a point of time t13, that is, when the conveyance speed of the reversing drum 201 reaches to the conveyance speed of 210 mm/sec nearly equal to the sheet conveyance speed in the image forming section 101, the movable holding member 400 of the reversing drum 201 receives the leading edge of the sheet P conveyed from the conveying roller 203. As described above, when the leading edge of the sheet is received, the conveyance speed of the reversing drum 201 is made nearly equal to the sheet conveyance speed in the image forming section 101, thereby, the leading edge portion of the sheet P is smoothly and securely held by the reversing drum 201. After the reversing drum 201 holds the leading edge portion of the sheet P, its conveyance speed is increased to 630 mm/sec at the point of time t13, as described above.

**[0087]** On the other hand, conveying rollers 203, 215, and 216 start rotation simultaneously with image formation in the image forming section 101, and are rotated at constant speed of 210 mm/sec which is the conveyance speed corresponding to the sheet conveyance speed in the image forming section 101. The conveyance speed of these rollers is increased to 630 mm/sec at the point of time t13 when the conveyance speed of the reversing drum 201 is increased from 210 mm/sec to 630 mm/sec, using the sheet leading edge detection signal of the sensor S1 as the reference.

**[0088]** Next, the conveyance speed of the reversing drum 201 is decreased from 630 mm/sec to 300 mm/sec at a point of time t14 at which the leading edge of the sheet P reaches the sheet stopping arm 204A.

**[0089]** After that, the reversing drum 201 stops at a point of time t15 at which a portion of the movable holding member, which is the sheet reading edge receiving section, is rotated to a home position. The conveying rollers 203, 215 and 216 continue to rotate at 630 mm/sec, their number of rotation is reduced to 210 mm/sec at the same point of time at which the reversing drum 201 stops, and the rotation is continued.

**[0090]** In the above operations, while the conveyance speed of the reversing drum 201 reaches from the start of rotation to the conveyance speed of 210 mm/sec, the movable holding member 400 reaches the apex position of the reversing drum 201 for receiving the leading edge portion of the sheet P. The home position of the movable holding member 400 is set to satisfy the above described conditions. Concretely, when the apex of the re-

versing drum 201 is defined to be 0°, the home position of the movable holding member 400 is a position of -10°.

[0091] The operation for increasing the speed of the reversing drum 201 and the conveying rollers 203, 215, 216 to 630 mm/sec, is carried out at a position at which the movable holding member 400 is rotated by 10° from the apex of the reversing drum 201.

[0092] The start and switching control of the conveyance speed of the reversing drum 201 and conveying rollers 203, 215, and 216, are carried out by time control by the timer, using the sheet leading edge detection control of the sensor S1 as the reference. In this connection, instead of the time control, a pulse motor may be used for the motor M to drive the reversing drum 201, and the driving motor M1 of the conveying rollers 215 and 216, and the control may be carried out according to the number of driving pulses of the motor, using the sheet leading edge detection signal of the sensor S1.

[0093] Fig. 17 is a time chart showing a time variation of the conveyance speed of the reversing drum 201 and the conveyance speed of the conveying rollers 203, 215, and 216, in the case of the conveyance of the middle sized sheet such as size A4 sheet longitudinal feeding (A4R), or size B5 sheet longitudinal feeding (B5R). The reversing drum 201 starts at a point of time t22 which is delayed by a predetermined time  $\Delta t$  from a point of time t21 of detection of the leading edge of the sheet by the sensor S1, and is rotated at 210 mm/sec. In the same manner as in the above-described small sized sheet, the conveying rollers 203, 215, and 216 are rotated at 210 mm/sec. The reversing drum 201 receives the leading edge portion of the sheet P at a point of time at which its conveyance speed reaches 210 mm/sec, and holds the sheet. Next, according to the detection signal of the trailing edge of the sheet P by the sensor S1, the conveyance speed of the reversing drum 201 is increased to 630 mm/sec at a point of time t23. Simultaneously, the conveyance speed of the conveying rollers 203, 215, and 216 is also increased to 630 mm/sec. In this case, because the conveyance speed of the reversing drum 201 is increased after the sensor P detects the trailing edge of the sheet, the sheet P is separated from the image forming section 101, and does not interfere with the increase of the speed.

[0094] At a point of time t24 at which the leading edge of the sheet P reaches the position of the sheet stopping arm 204A, the conveyance speed of the reversing drum 201 is decreased to 300 mm/sec, and the reversing drum 201 is rotated. After that, the reversing drum 201 stops at t25.

[0095] On the other hand, the conveyance speed of the conveying rollers 203, 215, and 216 is decreased to 210 mm/sec, and the rotation is continued. In the same manner as in the small sized sheet, these start and switching control of the reversing drum 201, and the conveying rollers 203, 215, and 216 are carried out by the time control or pulse control, using the signal of the sensor S1 as the reference. The reason why initially the

reversing drum 201 is rotated at low speed of 210 mm/sec, and then the speed is increased to 630 mm/sec, is as follows. At a point of time at which the leading edge of the sheet is received and held, the reliability of sheet P holding is securely obtained at low speed conveyance, and after that, by increasing the speed, the conveyance speed of the reversing drum 201 meets the sheet conveyance operation in the image forming section. That is, because the reversing drum 201 does not convey the sheet by the rotation from the stacking table 302 position to the home position, it conveys the sheet at the speed so much higher than that of the image forming section 101, and reversing processes the sheet continuously conveyed from the image forming section 101.

[0096] Fig. 18 is a time chart showing a time variation of the conveyance speed of the reversing drum 201 and the conveyance speed of the conveying rollers 203, 215, and 216, in the case of the conveyance of large sized sheet such as size A3 or size B4. The reversing drum 201 starts at a point of time t32 which is a predetermined time after from a point of time t31 of detection of the leading edge of the sheet by the sensor S1, and is rotated at 210 mm/sec. Next, at a point of time t33 at which the sensor S of the sheet delivery section in the image forming section 101 detects passage of trailing edge of the sheet, the rotation speed of the conveying rollers 203, 215, and 216 is increased to 1200 mm/sec. As described above, the conveying rollers 203, 215, and 216 convey the sheet P at 1200 mm/sec, while the reversing drum 201 conveys the sheet P at 210 mm/sec. As described above, when the trailing edge portion of the large sized sheet, which is difficult to be reversed, is conveyed at a higher speed than that of the leading edge portion of the sheet, the trailing edge portion of the sheet P is forcibly separated from the reversing drum 201, so that even a large sized sheet is securely reversed. In the case of the large sized sheet, sometimes the sheet P exists ranging from a position of the sheet stopping arm 204A to the image forming section 101. In this case, the control is carried out so that the speed is increased after the trailing edge of the sheet P is detected by the sensor S, provided in the sheet delivery section of the image forming section 101.

[0097] After sheet reversing, the conveyance speed of the conveying rollers 201, 215, and 216 returns to 210 mm/sec, which is the normal conveyance speed, at a point of time t34, and the reversing drum 201 stops at a point of time t35.

[0098] When a point of time of switching control of the conveyance speed of the conveying means in the sheet finishing apparatus 200 is set according to the signal from the sensor S1 arranged in the sheet delivery section of the image forming section 101, the sheet conveyance path in the sheet finishing apparatus 200 can be shortened, so that overall size of the sheet finishing apparatus can be reduced.

[0099] Referring to Fig. 16, aligning and stapling of the sheet P will be described below.

**[0100]** A sensor S2 is provided such that it detects the sheet passing through a position at which the sheet leading edge portion receiving portion of the reversing drum 201 is rotated by a predetermined angle, for example, by 155° from its apex. According to a signal from the sensor S2 at a point of time t41, position regulating members 221, and 222 are operated at a point of time t42, move by a distance corresponding to a sheet size, and align the sheet P. Reversing conveyance and alignment operations of the sheet P are carried out predetermined times, and a predetermined number of sheets P are collected on the stacking table 302. After the signal of the completion of the alignment operation in the width direction of the conveyance path is received, the staplers ST and ST1 are operated at points of time t51, and t52, and staple the sheets P. Two staplers ST and ST1 are not simultaneously operated, but are operated with time difference. At a point of time t61 at which a signal of completion of the operation of the staplers ST and ST1 is received, a motor to drive the sheet delivery member 204 is operated, and delivers the sheets P onto the reversed sheet delivery tray 206. The sheet delivery member 204 is reciprocated by a motor as described above, the speed of the motor is increased at t62, and the motor reciprocates the sheet delivery member 204 at a high speed.

**[0101]** According to the present invention, the reversing means receives the leading edge portion of the sheet at low speed rotation, and then, by increasing the conveyance speed of the reversing means, secured reverse conveying of the sheet, and reverse conveying, meeting the image forming section, can be carried out.

**[0102]** According to the present invention, the sheets reversed by the reversing means are aligned and accumulated on the stacking means.

**[0103]** According to the present invention, the sheet is securely reversed and conveyed onto stacking means.

## Claims

1. A sheet finishing apparatus (200) for receiving a sheet (P) on which an image has been formed by an image forming apparatus (100) and for ejecting the sheet after a front side thereof is reversed, the sheet finishing apparatus comprising:

(a) a sheet conveying means (203) for conveying the sheet fed from the image forming apparatus downstream;

(b) a sheet reversing means (201) for receiving the sheet conveyed by the sheet conveying means, and for reversing the front side of the sheet by rotation;

(c) a sheet stopping means (204) for blocking

a leading edge portion of the sheet to be stopped at a position where the front side of sheet is reversed by rotating the sheet reversing means;

(d) a sheet stacking means (206) for stacking the sheet separated from the sheet reversing means by a further rotation of the sheet reversing means after the leading edge portion of the sheet is blocked by the sheet stopping means; and characterised by further comprising

(e) a control means (C) for controlling the sheet conveying means and the sheet reversing means,

wherein after the control means drives the sheet conveying means and the sheet reversing means substantially at a same first conveyance speed to convey the leading edge portion of the sheet, when a conveyance angle of the sheet reversing means reaches a predetermined rotation angle, the control means controls the sheet conveying means and the sheet reversing means to increase conveyance linear speeds thereof, and then drives the sheet conveying means at a second conveyance speed higher than the first conveyance speed, while driving the sheet reversing means at the first conveyance speed, thereby a trailing portion of the sheet is conveyed to form a buckle of the sheet due to a difference in conveyance speed between the sheet reversing means and the sheet conveying means so that the sheet is separated from the sheet reversing means when the sheet is reversed.

2. The sheet finishing apparatus of claim 1 further comprising a sheet holding means (400, 401) provided on a peripheral portion of the sheet reversing means for holding the leading edge portion of the sheet conveyed by the sheet conveying means, the sheet holding means being capable of being opened or closed.
3. The sheet finishing apparatus of claim 1 further comprising a position regulating means (221, 222) provided on the sheet stacking means for regulating a position of the sheet in a direction perpendicular to a sheet conveying direction.
4. The sheet finishing apparatus of claim 1, wherein the sheet stopping means moves to push a leading edge of the sheet placed on the sheet stacking means so as to eject the sheet from the sheet stacking means.
5. The sheet finishing apparatus of claim 1, wherein the sheet reversing means comprises a drum (201)

for conveying the sheet by a rotation of the drum.

6. The sheet finishing apparatus of claim 1, wherein the sheet reversing means is provided on a part in a width direction of a sheet conveyance path, and the sheet finishing apparatus further comprises a sheet guiding means (211, 212) provided on the other part where the sheet reversing means is absent in the width direction of the sheet conveyance path for guiding the sheet, wherein the sheet guiding means includes a guiding surface having substantially the same shape as that of a sheet conveyance surface of the sheet reversing means. 5
7. The sheet finishing apparatus of claim 1 further comprising a sheet stapling means (ST, ST1) for stapling a plurality of sheets. 10
8. The sheet finishing apparatus of claim 1, wherein an angular position of the sheet reversing means at which a conveyance speed of the sheet is increased according to a size of the sheet, is changed. 15
9. The sheet finishing apparatus of claim 1, wherein the sheet finishing means is operated according to a signal sent from a sensor (210) for detecting that the sheet reversing means reaches a predetermined angular position. 20
10. The sheet finishing apparatus of claim 9, wherein the sheet finishing means is a stapler (ST, ST1) for stapling a plurality of sheets. 25
11. The sheet finishing apparatus of claim 9, wherein the sheet finishing means is a punch for punching the sheet. 30
12. The sheet finishing apparatus of claim 1, wherein a pulse motor (M) is used as the driving means for driving the sheet reversing means. 35
13. The sheet finishing apparatus of claim 1, wherein a pulse motor (M1) is used as the driving means for driving the sheet conveying means. 40
14. The sheet finishing apparatus of claim 12, wherein the conveyance speed of the sheet reversing means is changed according to a counting value of a number of pulses of a driving pulse of the pulse motor. 45
15. The sheet finishing apparatus of claim 1, wherein the sheet conveyance speed of the sheet reversing means from the first to second conveyance speed is switched over according to a detecting signal sent from a sheet sensor (S1) provided in a sheet receiving portion of the sheet finishing apparatus. 50
16. The sheet finishing apparatus of claim 1, wherein the conveyance speed of the sheet conveying means is increased according to a detecting signal sent from a sheet sensor (S1) provided in a sheet receiving portion of the sheet finishing apparatus. 55
17. The sheet finishing apparatus of claim 1, wherein the conveyance speed of the sheet conveying means is changed according to a detecting signal sent from a sensor (S) provided on a sheet delivering portion of an image forming section.
18. The sheet finishing apparatus of claim 1, wherein the first conveyance speed is substantially the same as a sheet conveyance speed at a sheet delivering portion of an image forming section.
19. The sheet finishing apparatus of claim 2, wherein the sheet holding means comprises a stationary holding member (401) fixed on the sheet reversing means and a movable holding member (400) being opened or closed by a cam (403) according to the rotation of the sheet reversing means.
20. The sheet finishing apparatus of claim 19, wherein the sheet holding means further comprises a resilient member (SP) for urging the movable holding member toward the stationary holding member to hold the sheet between the movable and stationary holding members.
21. The sheet finishing apparatus of claim 2, wherein the sheet conveying means comprises sheet conveyance members (213-216) provided above and on both outer sides adjacent to the sheet reversing means, and sheet guiding members (211, 212) provided on the both outer sides and along a rotation direction of a peripheral portion of the sheet reversing means.
22. The sheet finishing apparatus of claim 2 further comprising a sheet finishing means (ST, ST1) provided on the sheet stacking member for stapling sheets stacked on the sheet stacking member.
23. The sheet finishing apparatus of claim 2 further comprising an aligning means (405) provided on the sheet reversing means for pushing a leading edge portion of the sheet toward the sheet stopping means to collide with the sheet stopping means for alignment.
24. The sheet finishing apparatus of claim 23, wherein the aligning means includes a first aligning means (405) provided upstream of and adjacent to the sheet reversing means in a rotation direction of a receiving position of the sheet reversing means where the sheet reversing means receives the lead-

ing edge portion of the sheet, and a second aligning means (405) provided further upstream of the first aligning means.

L1 < L2

25. The sheet finishing apparatus of claim 24, wherein the aligning means includes an operating member (407) movable between a position at which the aligning means is protruded from a sheet conveyance surface of the sheet reversing means and a position at which the aligning means is not protruded from the sheet conveyance surface of the sheet reversing means.
26. The sheet finishing apparatus of claim 25, wherein the first and second aligning means satisfy the following expression:

$$\theta 1 > \theta 2$$

wherein  $\theta 1$  represents an angle between the operating member of the first aligning means and a tangential line of the sheet conveyance surface of the sheet reversing means when the operating member is positioned at a most protruded position, and  $\theta 2$  represents an angle between the operating member of the second aligning means and a tangential line of the sheet conveyance surface of the sheet reversing means when the operating member is positioned at a most protruded position.

27. The sheet finishing apparatus of claim 26, wherein the aligning means is rotatably supported around a shaft (406) provided on the sheet reversing means and includes a weight (408) by which the aligning means is oscillated around the shaft.
28. The sheet finishing apparatus of claim 2 further comprising a protrusion (2011) provided on a circumferential surface of the sheet reversing means for suppressing a floating of the sheet placed on the sheet stacking means.
29. The sheet finishing apparatus of claim 28, wherein a conveyance roller (213-216) having a first sheet conveyance surface is provided on the sheet conveying means adjacent to the sheet reversing means, and a protruded guiding surface (2012) representing a second sheet conveyance surface which has a height different from the first conveyance surface is provided on the sheet reversing means so that a straight advance property of the sheet can be enhanced.
30. The sheet finishing apparatus of claim 29, wherein the sheet reversing means includes the protrusion and the protruded guiding surface satisfying the following expression:

wherein L1 represents a length of the protrusion in a rotation direction of the sheet reversing means and L2 represents a length of the protruded guiding member in the direction of the sheet reversing means.

#### Patentansprüche

1. Blatt-Endbehandlungsvorrichtung (200) zur Aufnahme eines Blattes P, auf dem ein Bild von einer Bilderzeugungsvorrichtung (100) erzeugt wurde, und zum Auswerfen des Blattes, nachdem dessen Vorderseite gewendet wurde, wobei die Blatt-Endbehandlungsvorrichtung umfasst:

- a) ein Blattfördermittel (203) zum Fördern bzw. Transportieren des von der Bilderzeugungsvorrichtung zugeführten Blattes stromabwärts,
- b) ein Blattwendemittel (201) zur Aufnahme des von dem Blattfördermittel geförderten Blattes und zum Wenden der Vorderseite des Blattes durch Drehung,
- c) ein Blattanhaltemittel (204) zum Blockieren eines Vorderrandabschnittes des Blattes, so dass dieses an einer Position angehalten wird, an der die Vorderseite des Blattes durch Drehen des Blattwendemittels gewendet wird,
- d) ein Blattstapelmittel (206) zum Stapeln des von dem Blattwendemittel getrennten Blattes durch eine weitere Drehung des Blattwendemittels, nachdem der Vorderrandabschnitt des Blattes von dem Blattanhaltemittel blockiert wurde, und ferner dadurch gekennzeichnet, dass sie umfasst:
- e) ein Steuermittel (C) zum Steuern des Blattfördermittels und des Blattwendemittels,

wobei, nach dem das Steuermittel das Blattfördermittel und das Blattwendemittel im wesentlichen mit der gleichen ersten Fördergeschwindigkeit antreibt, um den Vorderrandabschnitt des Blattes zu fördern bzw. zu transportieren, wenn ein Förderwinkel des Blattwendemittels einen vorbestimmten Drehwinkel erreicht, das Steuermittel das Blattfördermittel und das Blattwendemittel so steuert, dass deren lineare Fördergeschwindigkeiten erhöht werden, und dann das Blattfördermittel mit einer zweiten Fördergeschwindigkeit antreibt, die höher ist als die erste Fördergeschwindigkeit, während das Blattwendemittel mit der ersten Fördergeschwindigkeit angetrieben wird, wodurch ein Hinterabschnitt des Blattes so transportiert wird, so dass infolge eines Unterschiedes in der Fördergeschwindigkeit zwischen dem Blattwendemittel und

- dem Blattfördermittel eine Wölbung des Blattes gebildet wird, so dass das Blatt von dem Blattwendemittel getrennt bzw. separiert wird, wenn das Blatt gewendet wird.
2. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, ferner mit einem Blatthaltemittel (400, 401), das an einem Umfangsabschnitt des Blattwendemittels zum Halten des Vorderrandabschnittes des von dem Blattfördermittel geförderten Blattes vorgesehen ist, wobei das Blatthaltemittel geöffnet oder geschlossen werden kann. 5
  3. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, ferner mit einem Positionsregelmittel (221, 222), das an dem Blattstapelmittel zum Regeln einer Position des Blattes in einer zu einer Blattförderrichtung senkrechten Richtung vorgesehen ist. 10
  4. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei sich das Blattanhaltemittel bewegt, um einen Vorderrand des auf dem Blattstapelmittel platzierten Blattes so zu schieben, dass das Blatt von dem Blatt-Heftermittel ausgeworfen wird. 15
  5. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei das Blattwendemittel eine Trommel (201) zum Fördern des Blattes durch eine Drehung der Trommel umfasst. 20
  6. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei das Blattwendemittel an einem Teil in einer Breitenrichtung eines Blattförderpfads vorgesehen ist, und die Blatt-Endbehandlungsvorrichtung ferner ein Blattführungsmittel (211, 212) umfasst, dass an dem anderen Teil, an dem das Blattwendemittel in der Breitenrichtung des Blattförderpfads nicht vorhanden ist, zum Führen des Blattes vorgesehen ist, wobei das Blattführungsmittel eine Führungsfläche mit im wesentlichen der gleichen Form wie der einer Blattförderfläche des Blattwendemittels aufweist. 25
  7. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, ferner mit einem Blatt-Heftermittel (ST, ST1) zum Heften mehrerer Blätter. 30
  8. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei eine Winkelposition des Blattwendemittels, an der eine Fördergeschwindigkeit des Blattes gemäß einer Größe des Blattes erhöht wird, verändert wird. 35
  9. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei die Blatt-Endbehandlungsvorrichtung gemäß einem von einem Sensor (210) zum Detektieren, dass das Blattwendemittel eine vorbestimmte Winkelposition erreicht, gesendeten Signal betrieben wird. 40
  10. Blatt-Endbehandlungsvorrichtung nach Anspruch 9, wobei die Blatt-Endbehandlungsvorrichtung ein Hefter (ST, ST1) zum Heften mehrerer Blätter ist. 45
  11. Blatt-Endbehandlungsvorrichtung nach Anspruch 9, wobei die Blatt-Endbehandlungsvorrichtung ein Stanzteil zum Stanzen des Blattes ist. 50
  12. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei ein Pulsmotor (M) als das Antriebsmittel zum Antreiben des Blattwendemittels verwendet wird. 55
  13. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei ein Pulsmotor (M1) als das Antriebsmittel zum Antreiben des Blattfördermittels verwendet wird.
  14. Blatt-Endbehandlungsvorrichtung nach Anspruch 12, wobei die Fördergeschwindigkeit des Blattwendemittels gemäß einem Zählwert einer Anzahl von Pulsen eines Antriebspulses des Pulsmotors verändert wird.
  15. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei die Blattfördergeschwindigkeit des Blattwendemittels von der ersten zur zweiten Fördergeschwindigkeit gemäß einem in einem Blattepfangsabschnitt der Blatt-Endbehandlungsvorrichtung vorgesehenen Blattsensor (S1) gesendeten Detektionssignal umgeschaltet wird.
  16. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei die Fördergeschwindigkeit des Blattfördermittels gemäß einem in einem Blattaufnahmeabschnitt der Blatt-Endbehandlungsvorrichtung vorgesehenen Blattsensor (S1) gesendeten Detektionssignal erhöht wird.
  17. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei die Fördergeschwindigkeit des Blattfördermittels gemäß einem von einem an einem Blattzufuhrabschnitt eines Bilderzeugungsabschnitts vorgesehenen Sensor (S) gesendeten Detektionssignals geändert wird.
  18. Blatt-Endbehandlungsvorrichtung nach Anspruch 1, wobei die erste Fördergeschwindigkeit im wesentlichen die gleiche ist, wie eine Blattfördergeschwindigkeit an einem Blattzufuhrabschnitt eines Bilderzeugungsabschnitts.
  19. Blatt-Endbehandlungsvorrichtung nach Anspruch 2, wobei das Blatthaltemittel ein stationäres Halteelement (401), das an dem Blattwendemittel befestigt ist, und ein bewegliches Halteelement (400),

das durch eine Nocke bzw. Steuerkurve (403) gemäß der Drehung des Blattwendemittels geöffnet oder geschlossen wird, umfasst.

$\theta 1 > \theta 2$

20. Blatt-Endbehandlungsvorrichtung nach Anspruch 19, wobei das Blattthaltemittel ferner ein federndes bzw. elastisches Element (SP) zum Vorbelasten des beweglichen Halteelements zu dem stationären Halteelement umfasst, um das Blatt zwischen den beweglichen und den stationären Halteelementen zu halten. 5 10
21. Blatt-Endbehandlungsvorrichtung nach Anspruch 2, wobei das Blattfördermittel Blattfördererelemente (213-216) umfasst, die oberhalb und auf beiden Außenseiten nahe an dem Blattwendemittel vorgesehen sind, sowie Blattführungselemente (211,212), die an den beiden Außenseiten und entlang einer Drehrichtung eines Umfangsabschnittes des Blattwendemittels vorgesehen sind. 15 20
22. Blatt-Endbehandlungsvorrichtung nach Anspruch 2, ferner mit einem Blattendbehandlungsmittel (ST, ST1), das an dem Blattstapelelement zum Heften von auf dem Blattstapelelement gestapelten Blättern vorgesehen ist. 25
23. Blatt-Endbehandlungsvorrichtung nach Anspruch 2, ferner mit einem Ausrichtmittel (405), das an dem Blattwendemittel zum Schieben eines Vorderrandabschnittes des Blattes zu dem Blattanhaltemittel, um mit dem Blattanhaltemittel zur Ausrichtung zu kollidieren, vorgesehen ist. 30
24. Blatt-Endbehandlungsvorrichtung nach Anspruch 23, wobei das Ausrichtmittel ein erstes Ausrichtmittel (405), das stromaufwärts und benachbart zu dem Blattwendemittel in einer Drehrichtung einer Aufnahmeposition des Blattwendemittels vorgesehen ist, wo das Blattwendemittel den Vorderrandabschnitt des Blattes aufnimmt, und ein zweites Ausrichtmittel (405), das weiter stromauf von dem ersten Ausrichtmittel vorgesehen ist, aufweist. 35 40
25. Blatt-Endbehandlungsvorrichtung nach Anspruch 24, wobei das Ausrichtmittel ein Betätigungselement (407) aufweist, das zwischen einer Position, an der das Ausrichtmittel von einer Blattförderfläche des Blattwendemittels vorsteht, und einer Position, an der das Ausrichtmittel von der Blattförderfläche des Blattwendemittels nicht vorsteht, bewegbar ist. 45 50
26. Blatt-Endbehandlungsvorrichtung nach Anspruch 25, wobei die ersten und zweiten Ausrichtmittel den folgenden Ausdruck erfüllen: 55

wobei  $\theta 1$  einen Winkel zwischen dem Betätigungselement des ersten Ausrichtmittels und einer Tangentiallinie der Blattförderfläche des Blattwendemittels ist, wenn das Betätigungselement an einer am weitesten vorstehenden Position positioniert ist, und  $\theta 2$  einen Winkel zwischen dem Betätigungselement des zweiten Ausrichtmittels und einer Tangentiallinie der Blattförderfläche des Blattwendemittels darstellt, wenn das Betätigungselement an einer am weitesten vorstehenden Position positioniert ist.

27. Blatt-Endbehandlungsvorrichtung nach Anspruch 26, wobei das Ausrichtmittel drehbar um eine Achse (406) gelagert ist, die an dem Blattwendemittel vorgesehen ist, und ein Gewicht (408) aufweist, durch das das Ausrichtmittel um die Achse hin und her bewegt wird.
28. Blatt-Endbehandlungsvorrichtung nach Anspruch 2, ferner mit einem Vorsprung (2011), der an einer Außenumfangsfläche des Blattwendemittels vorgesehen ist, um ein Schweben des auf dem Blattstapelmedium platzierten Blattes zu unterdrücken.
29. Blatt-Endbehandlungsvorrichtung nach Anspruch 28, wobei eine Förderrolle (213-216) mit einer ersten Blattförderfläche an dem Blattfördermittel nahe dem Blattwendemittel vorgesehen ist, und eine vorstehende Führungsfläche (2012), die eine zweite Blattförderfläche darstellt, die eine von der ersten Förderfläche unterschiedliche Höhe aufweist, an dem Blattwendemittel derart vorgesehen ist, dass eine Eigenschaft der geraden Vorwärtsbewegung des Blattes verbessert werden kann.
30. Blatt-Endbehandlungsvorrichtung nach Anspruch 29, wobei das Blattwendemittel den Vorsprung aufweist und die vorstehende Führungsfläche den folgenden Ausdruck erfüllt:

$L1 < L2$

wobei  $L1$  eine Länge des Vorsprungs in einer Drehrichtung des Blattwendemittels darstellt, und  $L2$  eine Länge des vorstehenden Führungselements in der Richtung des Blattwendemittels darstellt.

## Revendications

1. Un dispositif de parachèvement de feuilles (200) pour recevoir une feuille (P) sur laquelle une image



a été formée par un appareil de formation d'images (100), et pour éjecter la feuille une fois le retournement d'une face avant de celle-ci effectué, le dispositif de parachèvement de feuilles comprenant :

- (a) des moyens de transport de feuilles (203) pour transporter en aval la feuille fournie par l'appareil de formation d'images ;
- (b) des moyens de retournement de feuilles (201) pour recevoir la feuille transportée par les moyens de transport, et pour retourner la face avant de la feuille par rotation ;
- (c) des moyens formant butoir de feuilles (204) pour bloquer une partie de bord avant de la feuille dans une position dans laquelle la face avant de la feuille est retournée par rotation des moyens de retournement ;
- (d) des moyens d'empilement de feuilles (206) pour empiler la feuille séparée des moyens de retournement de feuilles par une rotation supplémentaire des moyens de retournement de feuilles, après que la partie de bord avant de la feuille est bloquée par les moyens formant butoir de feuilles ; et caractérisé en ce qu'il comporte en outre
- (e) des moyens de contrôle (C) pour contrôler les moyens de transport de feuilles et les moyens de retournement de feuilles,

dans lequel, après que les moyens de contrôle entraînent les moyens de transport de feuilles et les moyens de retournement de feuilles sensiblement à une même première vitesse de transport pour transporter la partie de bord avant de la feuille, lorsqu'un angle de transport des moyens de retournement de feuilles atteint un angle de rotation prédéterminé, les moyens de contrôle contrôlent les moyens de transport de feuilles et les moyens de retournement de feuilles pour augmenter leurs vitesses linéaires de transport, et entraînent ensuite les moyens de transport à une deuxième vitesse de transport supérieure à la première vitesse de transport, tout en entraînant les moyens de retournement de feuilles à la première vitesse de transport, de sorte qu'une partie arrière de la feuille soit transportée pour former une boucle de la feuille due à une différence de vitesse de transport entre les moyens de retournement de feuilles et les moyens de transport de feuilles, et que la feuille soit séparée des moyens de retournement de feuilles lorsque la feuille est retournée.

2. Le dispositif de parachèvement de feuilles selon la revendication 1, comprenant également des moyens de retenue de feuilles (400, 401) prévus sur une partie périphérique des moyens de retournement de feuilles pour retenir la partie de bord avant de la feuille transportée par les moyens de transport

de feuilles, les moyens de retenue de feuilles étant susceptibles d'être ouverts ou fermés.

3. Le dispositif de parachèvement de feuilles selon la revendication 1, comprenant également des moyens de régulation de position (221, 222) prévus sur les moyens d'empilement de feuilles pour réguler la position de la feuille dans une direction perpendiculaire à la direction de transport des feuilles.
4. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel les moyens formant butoir de feuilles se déplacent pour pousser le bord avant de la feuille placée sur les moyens d'empilement de feuilles afin d'éjecter la feuille des moyens d'empilement de feuilles.
5. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel les moyens de retournement de feuilles comprennent un tambour (201) pour transporter la feuille par une rotation du tambour.
6. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel les moyens de retournement de feuilles sont prévus sur une partie dans le sens de la largeur d'une trajectoire de transport de la feuille, et le dispositif de parachèvement de feuilles comprend en outre des moyens de guidage de feuilles (211, 212) prévus sur l'autre partie où les moyens de retournement de feuilles sont absents dans le sens de la largeur de la trajectoire de transport de la feuille pour guider la feuille, les moyens de guidage de feuilles comprenant une surface de guidage ayant sensiblement la même forme que celle de la surface de transport de feuille des moyens de retournement de feuilles.
7. Le dispositif de parachèvement de feuilles selon la revendication 1, comprenant également des moyens d'agrafage de feuilles (ST, ST1) pour agrafer plusieurs feuilles.
8. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel on modifie la position angulaire des moyens de retournement de feuilles pour laquelle la vitesse de transport de la feuille est augmentée en fonction de la taille de la feuille.
9. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel les moyens de parachèvement de feuilles sont actionnés en correspondance à un signal envoyé par un capteur (210) pour détecter que les moyens de retournement de feuilles atteignent une position angulaire prédéterminée.
10. Le dispositif de parachèvement de feuilles selon la

- revendication 9, dans lequel les moyens de parachèvement de feuilles consistent en une agrafeuse (ST, ST1) pour agraffer plusieurs feuilles.
11. Le dispositif de parachèvement de feuilles selon la revendication 9, dans lequel les moyens de parachèvement de feuilles consistent en une poinçonneuse pour poinçonner la feuille. 5
  12. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel un moteur pas à pas (M) est utilisé comme moyens d'entraînement pour entraîner les moyens de retournement de feuilles. 10
  13. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel un moteur pas à pas (M1) est utilisé comme moyens d'entraînement pour entraîner les moyens de transport de feuilles. 15
  14. Le dispositif de parachèvement de feuilles selon la revendication 12, dans lequel la vitesse de transport des moyens de retournement de feuilles est modifiée en correspondance à une valeur de comptage du nombre d'impulsions d'une impulsion d'entraînement du moteur pas à pas. 20  
25
  15. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel la vitesse de transport de feuilles des moyens de retournement de feuilles est commutée de la première à la deuxième vitesse de transport en correspondance à un signal de détection envoyé par un capteur de feuilles (S1) prévu dans une partie de réception de feuilles du dispositif de parachèvement de feuilles. 30
  16. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel la vitesse de transport des moyens de transport de feuilles est augmentée en correspondance à un signal de détection envoyé par un capteur de feuilles (S1) prévu dans une partie de réception de feuilles du dispositif de parachèvement de feuilles. 35  
40
  17. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel la vitesse de transport des moyens de transport de feuilles est modifiée en correspondance à un signal de détection envoyé par un capteur de feuilles (S) prévu sur une partie de sortie de feuilles d'une partie de formation d'images. 45  
50
  18. Le dispositif de parachèvement de feuilles selon la revendication 1, dans lequel la première vitesse de transport est sensiblement la même que la vitesse de transport de feuilles sur une partie de sortie de feuilles d'une partie de formation d'images. 55
  19. Le dispositif de parachèvement de feuilles selon la revendication 2, dans lequel les moyens de retenue de feuilles comprennent un élément de retenue fixe (401) fixé sur les moyens de retournement de feuilles et un élément de retenue mobile (400) ouvert ou fermé par une came (403) en fonction de la rotation des moyens de retournement de feuilles.
  20. Le dispositif de parachèvement de feuilles selon la revendication 19, dans lequel les moyens de retenue de feuilles comprennent également un élément élastique (SP) pour solliciter l'élément de retenue mobile vers l'élément de retenue fixe afin de retenir la feuille entre les éléments de retenue mobiles et fixes.
  21. Le dispositif de parachèvement de feuilles selon la revendication 2, dans lequel les moyens de transport de feuilles comprennent des éléments de transport de feuilles (213 à 216) prévus au-dessus et sur les deux faces extérieures adjacentes aux moyens de retournement de feuilles, et des éléments de guidage de feuilles (211, 212) prévus sur les deux faces extérieures et selon le sens de rotation d'une partie périphérique des moyens de retournement de feuilles.
  22. Le dispositif de parachèvement de feuilles selon la revendication 2, comprenant également des moyens de parachèvement de feuilles (ST, ST1) prévus sur l'élément d'empilement de feuilles pour agraffer les feuilles empilées sur l'élément d'empilement de feuilles.
  23. Le dispositif de parachèvement de feuilles selon la revendication 2, comprenant également des moyens d'alignement (405) prévus sur les moyens de retournement de feuilles pour pousser une partie de bord avant de la feuille vers les moyens formant butoir de feuilles afin d'entrer en collision avec les moyens formant butoir de feuilles pour l'alignement.
  24. Le dispositif de parachèvement de feuilles selon la revendication 23, dans lequel les moyens d'alignement comprennent des premiers moyens d'alignement (405) prévus en amont et adjacents aux moyens de retournement de feuilles dans un sens de rotation d'une position de réception des moyens de retournement de feuilles où les moyens de retournement de feuilles reçoivent la partie de bord avant de la feuille, et des deuxièmes moyens d'alignement (405) prévus plus en amont des premiers moyens d'alignement.
  25. Le dispositif de parachèvement de feuilles selon la revendication 24, dans lequel les moyens d'alignement comprennent un organe d'actionnement (407) mobile entre une position dans laquelle les moyens d'alignement font saillie d'une surface de transport

de feuilles des moyens de retournement de feuilles,  
et une position dans laquelle les moyens d'alignement ne font pas saillie de la surface de transport de feuilles des moyens de retournement de feuilles.

$L1 < L2$

26. Le dispositif de parachèvement de feuilles selon la revendication 25, dans lequel les premiers et deuxièmes moyens d'alignement satisfont à l'expression suivante :

5

10

$\theta 1 > \theta 2$

où  $\theta 1$  représente l'angle entre l'organe d'actionnement des premiers moyens d'alignement et une ligne tangentielle à la surface de transport de feuilles des moyens de retournement de feuilles lorsque l'organe d'actionnement se trouve dans sa position la plus en saillie, et  $\theta 2$  représente l'angle entre l'organe d'actionnement des deuxièmes moyens d'alignement et une ligne tangentielle à la surface de transport de feuilles des moyens de retournement de feuilles lorsque l'organe d'actionnement se trouve dans sa position la plus en saillie.

15

20

25

27. Le dispositif de parachèvement de feuilles selon la revendication 26, dans lequel les moyens d'alignement sont supportés à rotation autour d'un arbre (406) prévu sur les moyens de retournement de feuilles et comprennent un poids (408) grâce auquel les moyens d'alignement oscillent autour de l'arbre.

30

28. Le dispositif de parachèvement de feuilles selon la revendication 2, comprenant également une saillie (2011) prévue sur une surface circonférentielle des moyens de retournement de feuilles pour supprimer le flottement de la feuille placée sur les moyens d'empilement de feuilles.

35

40

29. Le dispositif de parachèvement de feuilles selon la revendication 28, dans lequel un rouleau de transport (213 à 216) possédant une première surface de transport de feuilles est prévu sur les moyens de transport de feuilles adjacents aux moyens de retournement de feuilles, et une surface de guidage en saillie (2012) constituant une deuxième surface de transport de feuilles d'une hauteur différente de celle de la première surface de transport est prévue sur les moyens de retournement de feuilles afin d'améliorer la propriété d'avance en ligne droite de la feuille.

45


50

30. Le dispositif de parachèvement de feuilles selon la revendication 29, dans lequel les moyens de retournement de feuilles comprennent la saillie et la surface de guidage en saillie satisfaisant à l'expression suivante :

55

où  $L1$  représente la longueur de la saillie dans la direction de rotation des moyens de retournement de feuilles et  $L2$  représente la longueur de l'élément de guidage en saillie dans la direction des moyens de retournement de feuilles.

FIG. 1

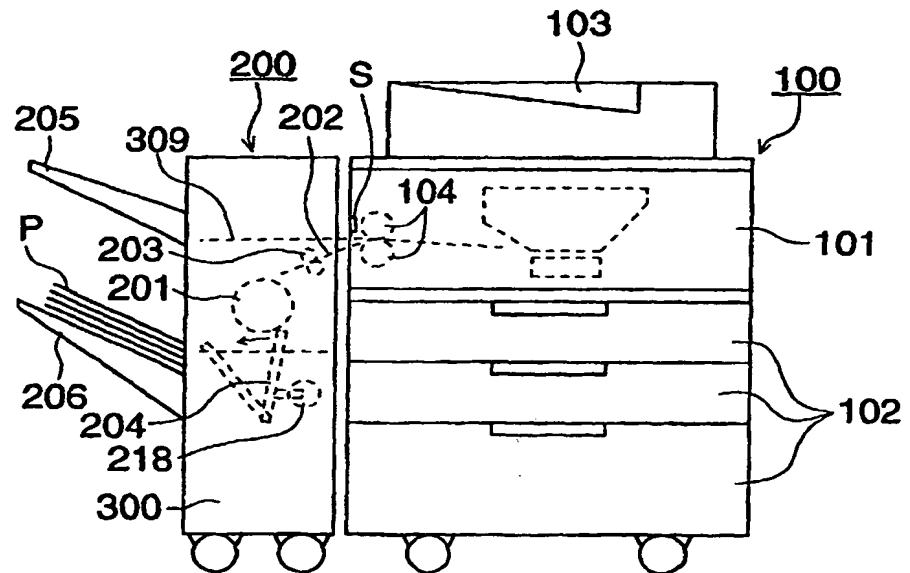

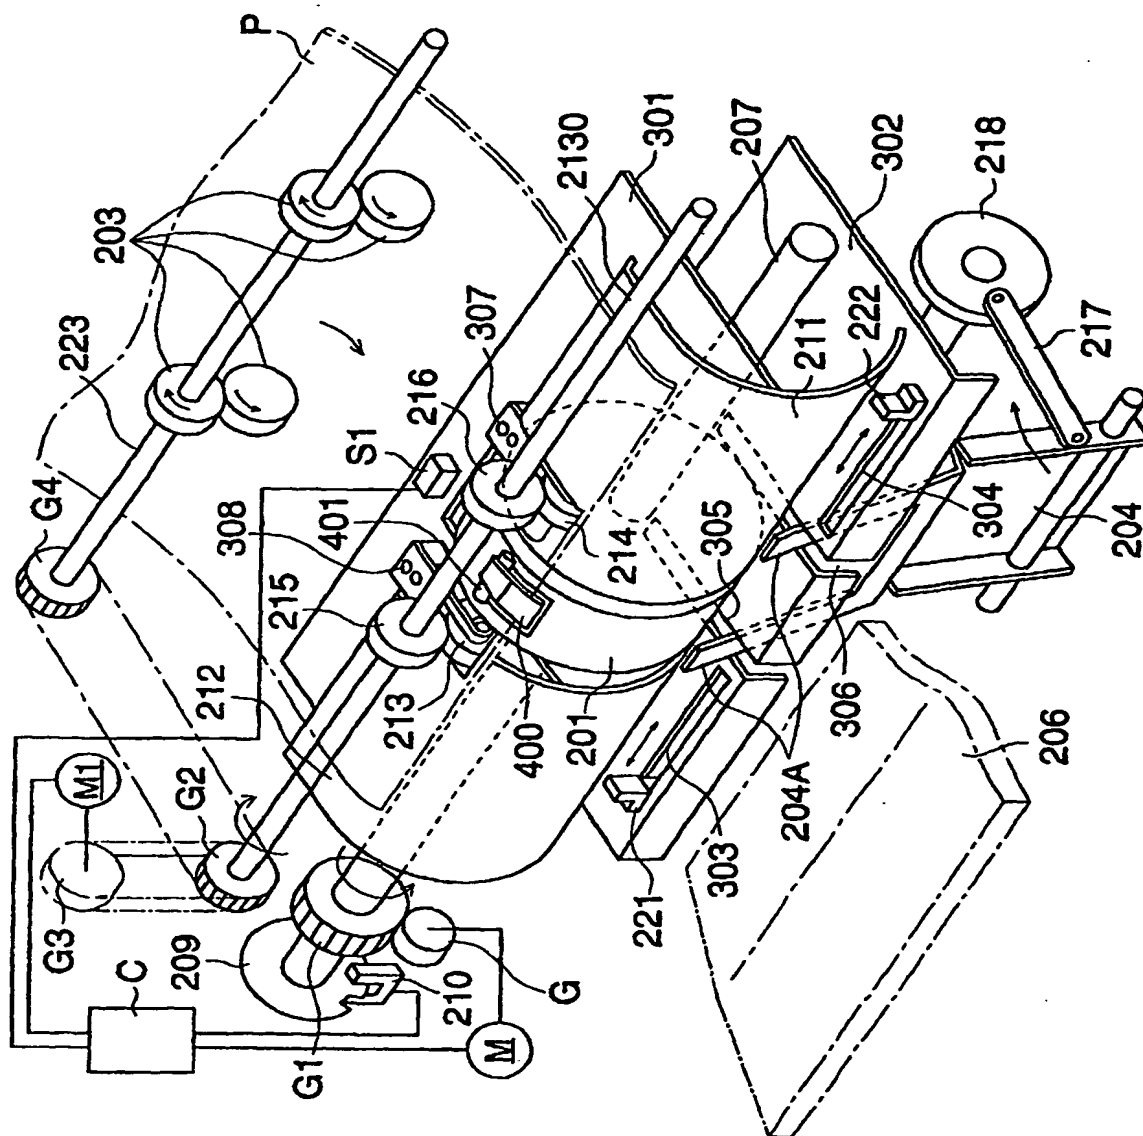


FIG. 2

FIG. 3



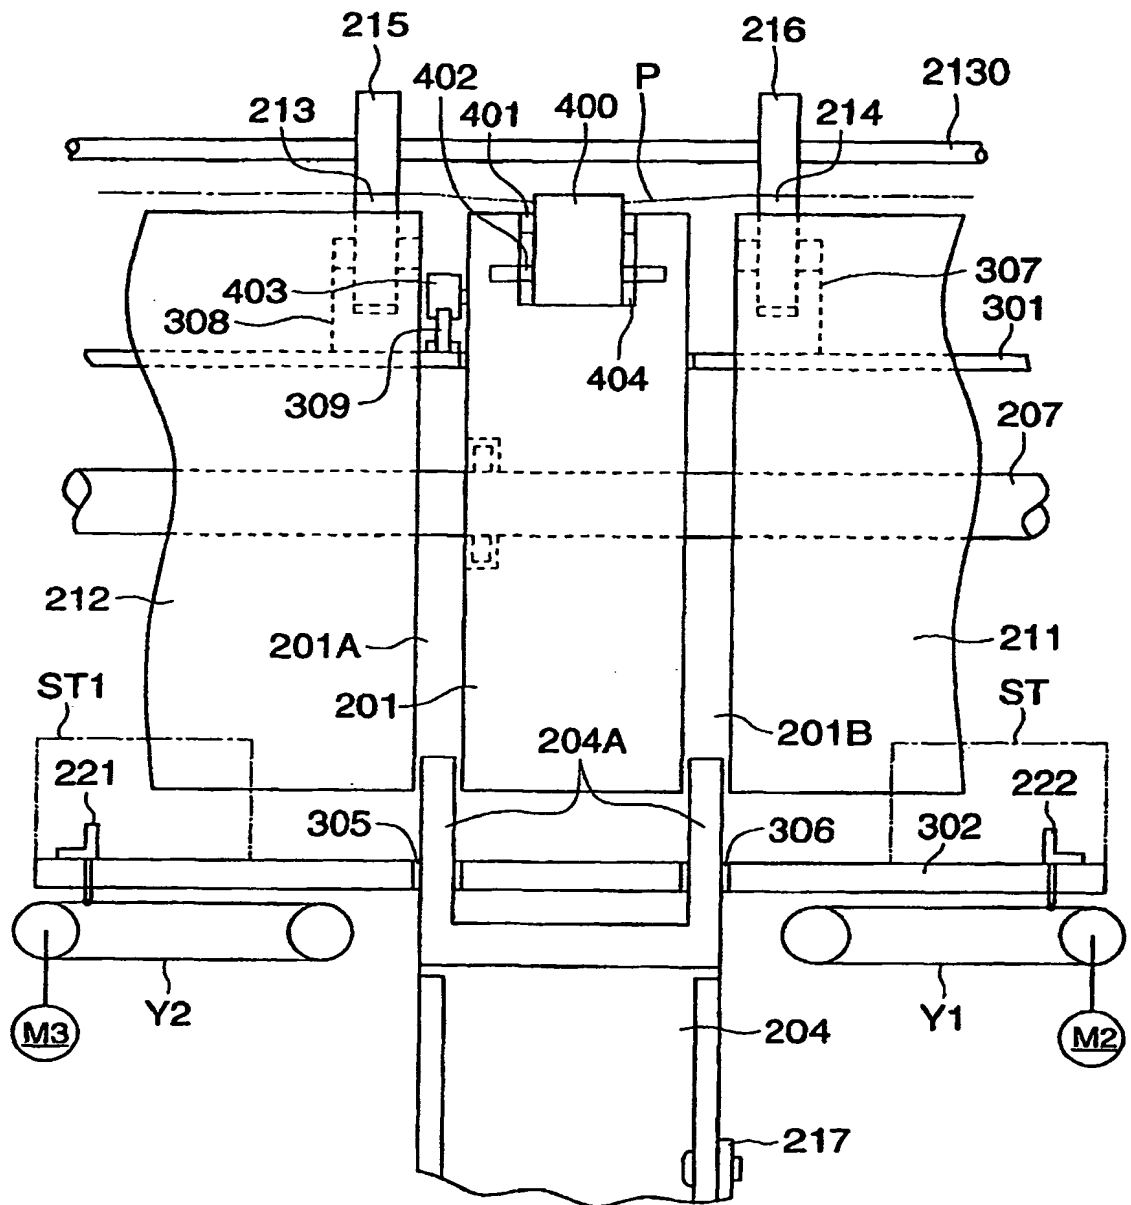



FIG. 4



உ  
க  
ட

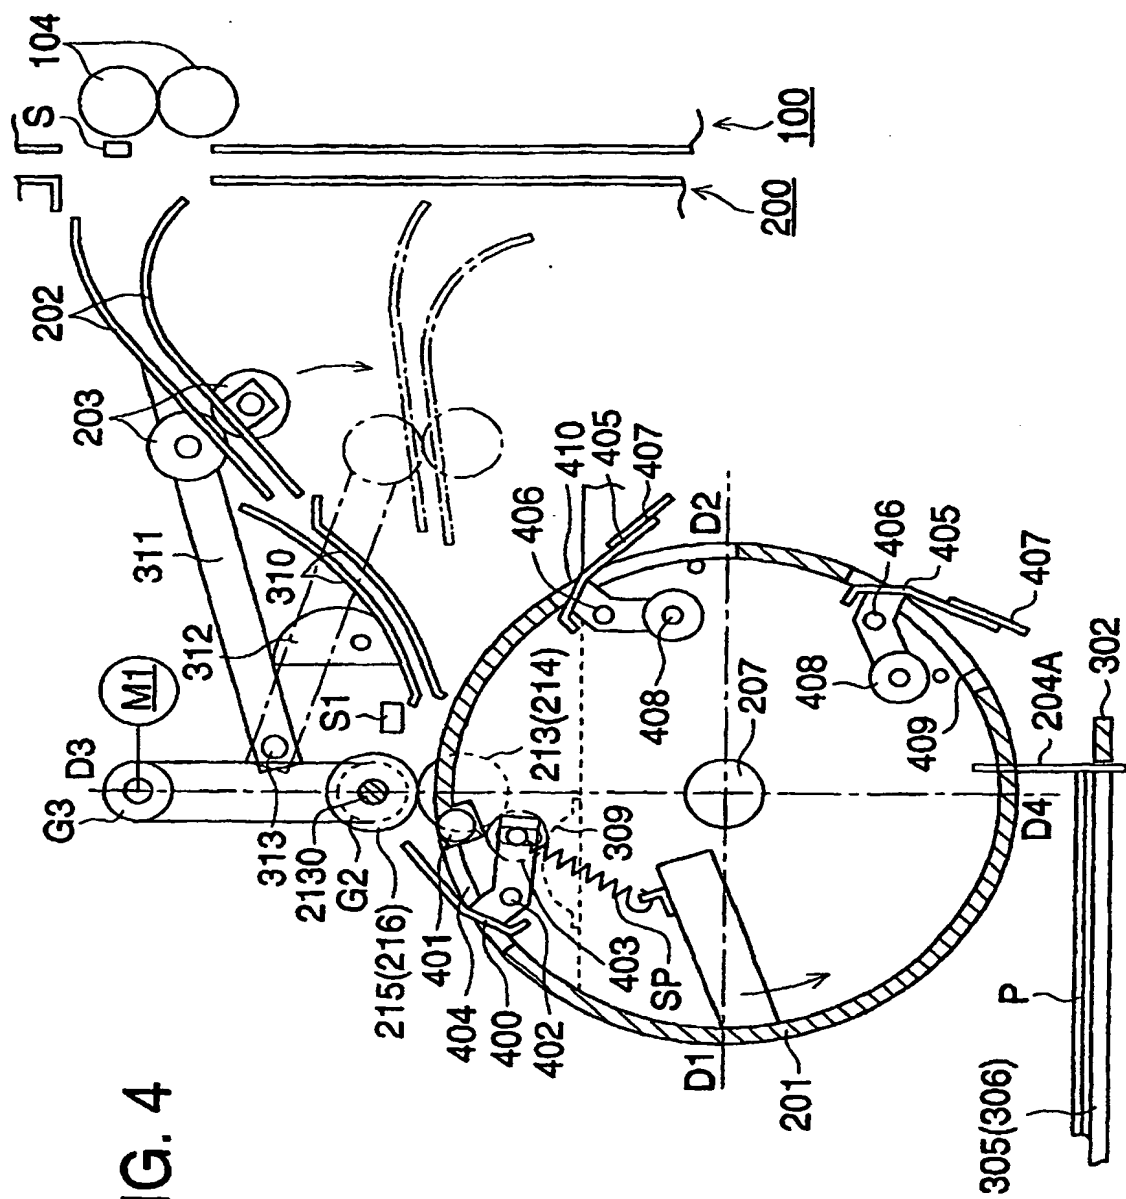


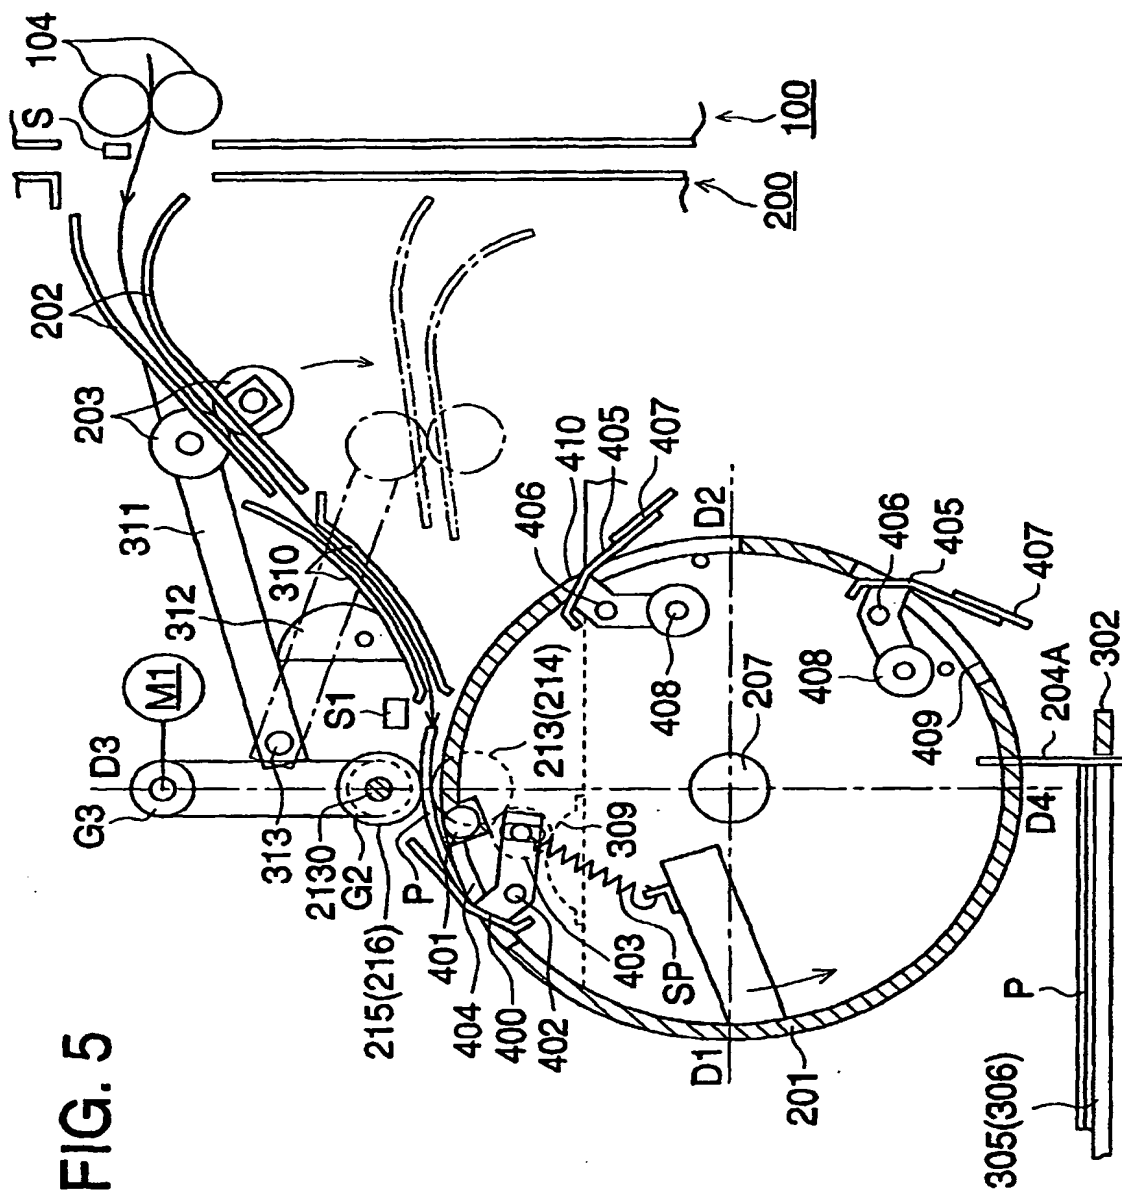

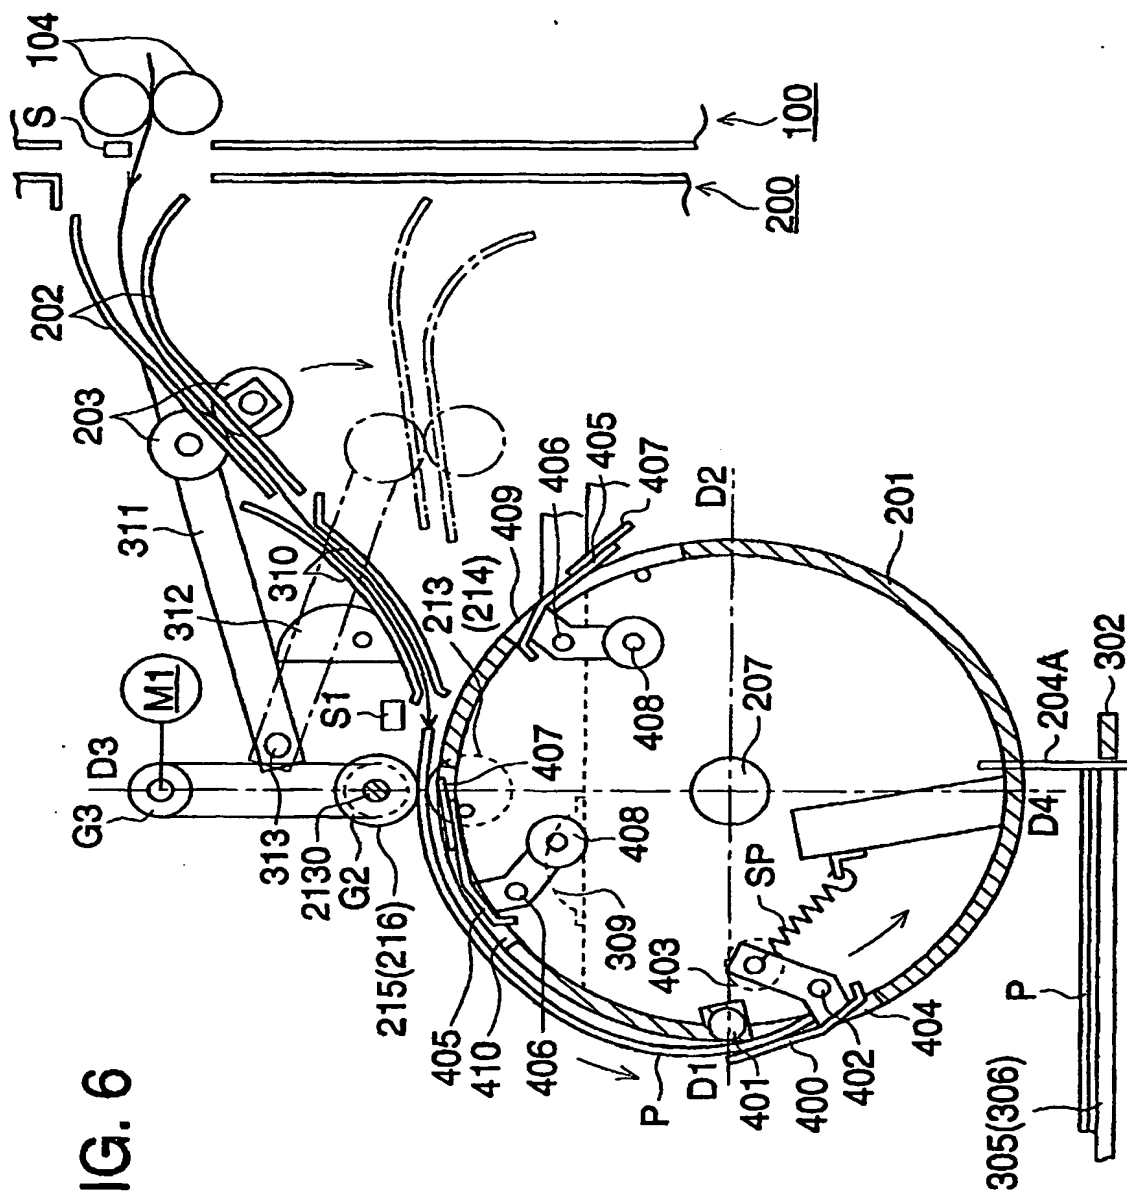

୫୫

FIG. 7

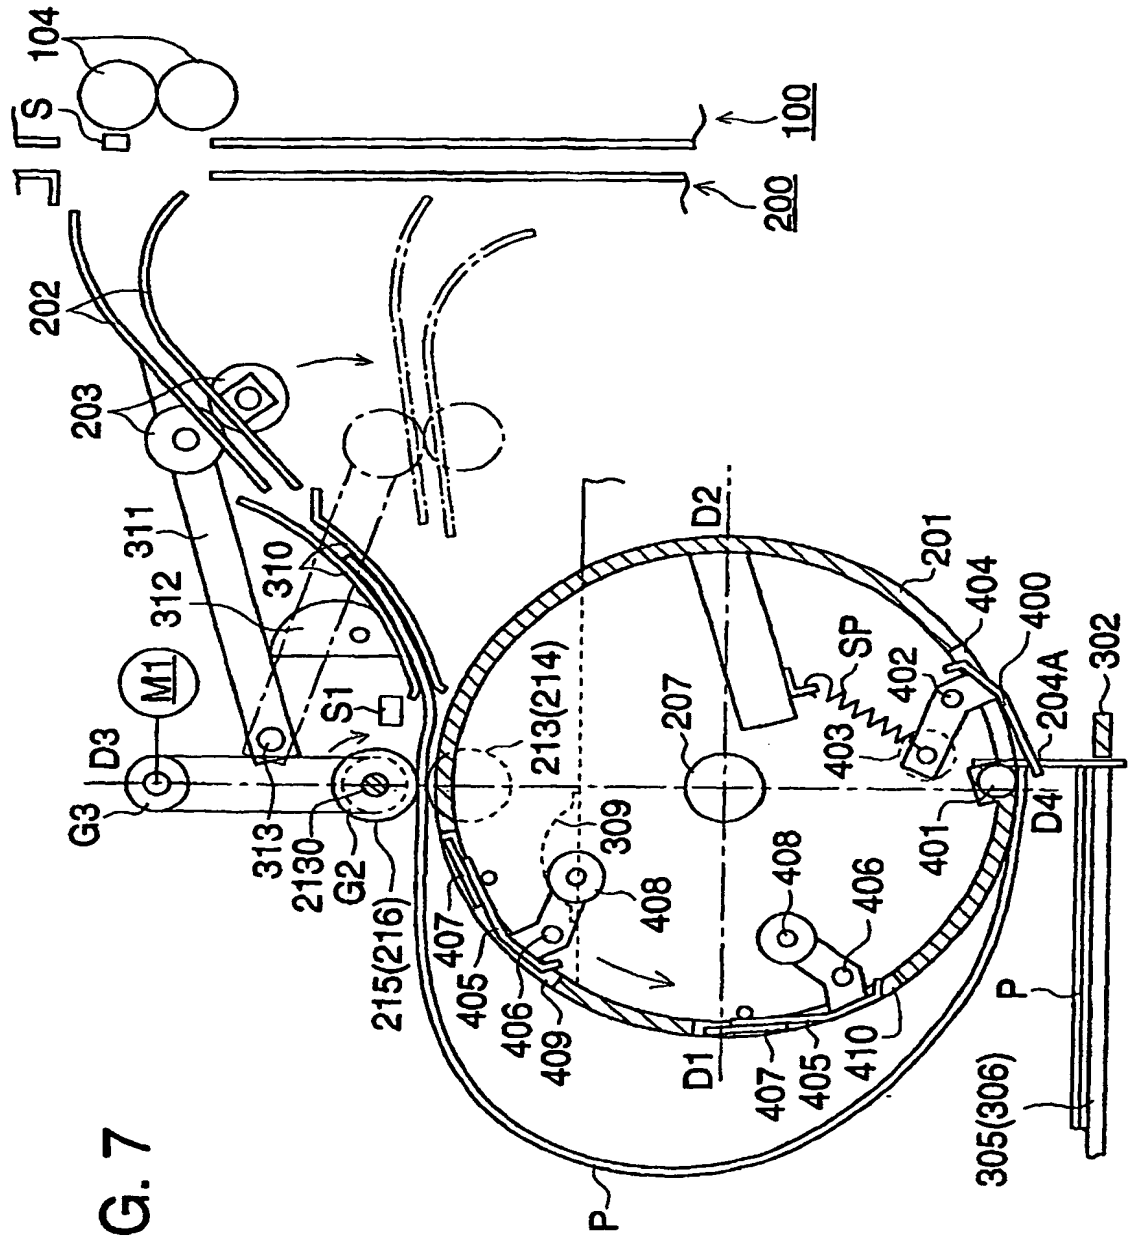

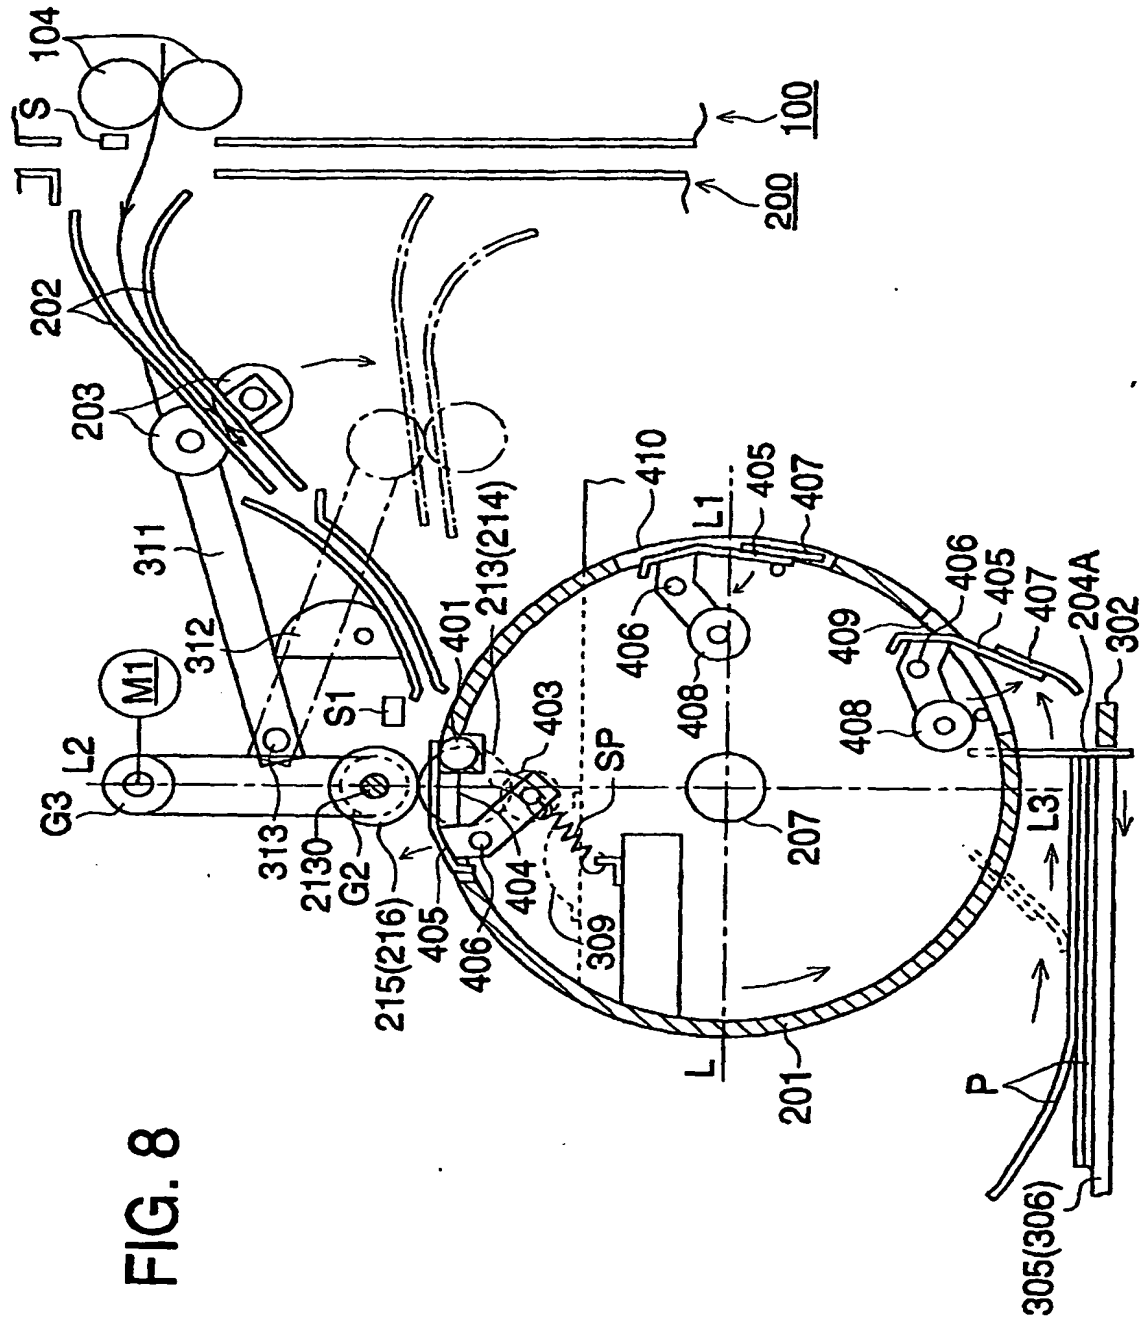


FIG. 9

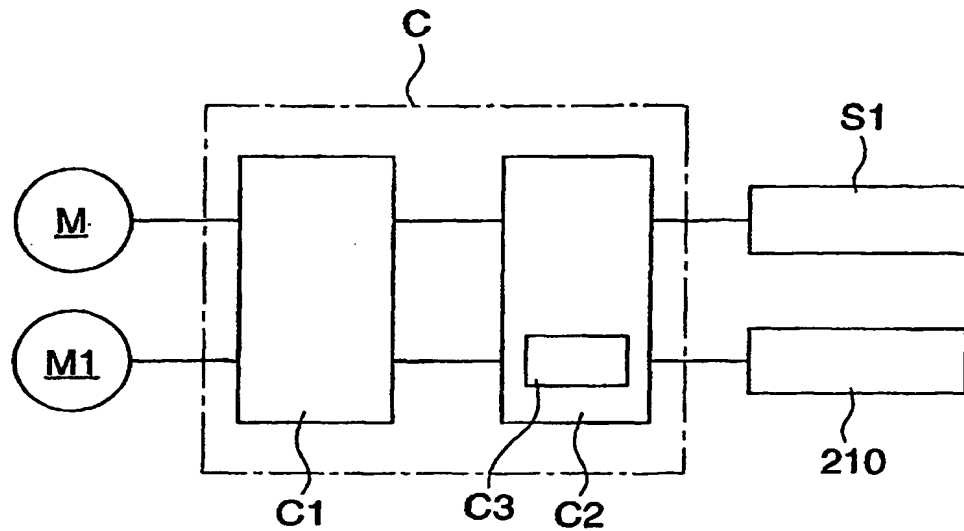


FIG. 10

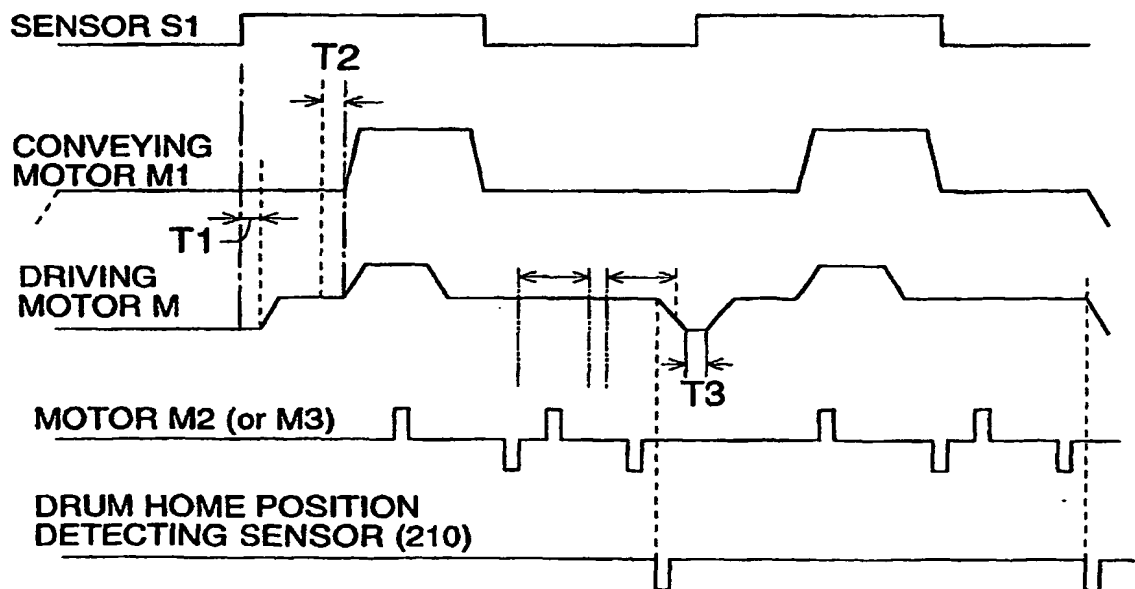


FIG. 11

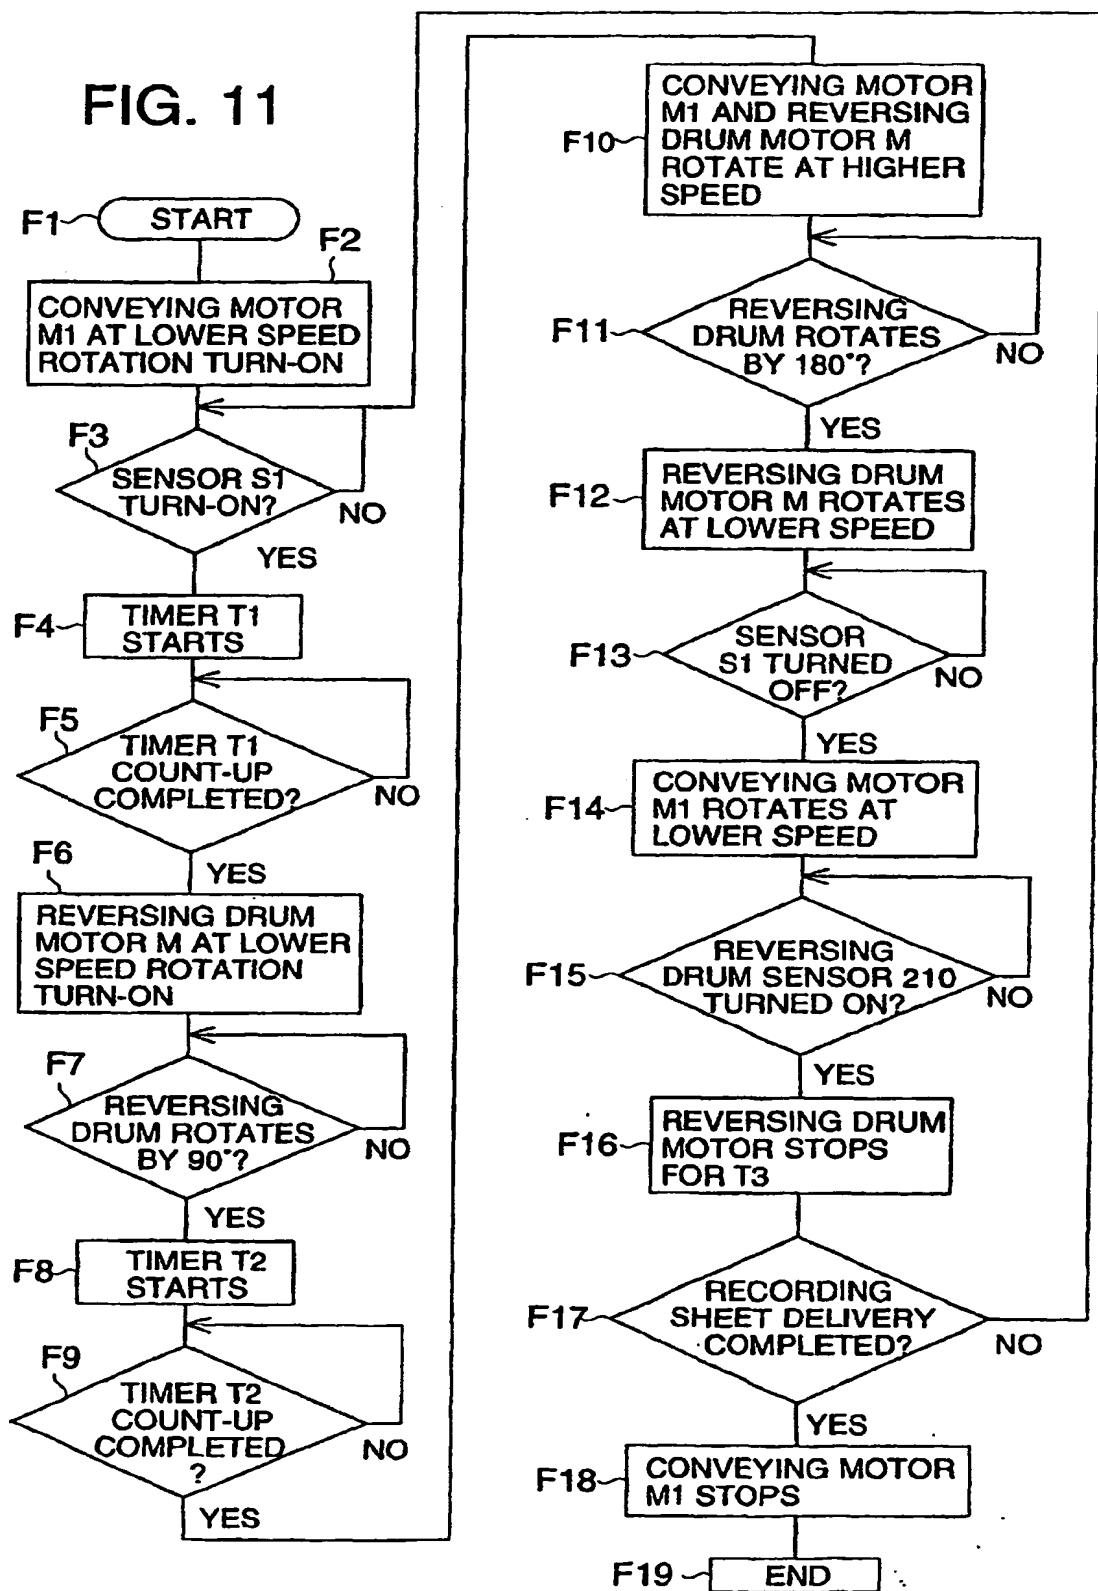
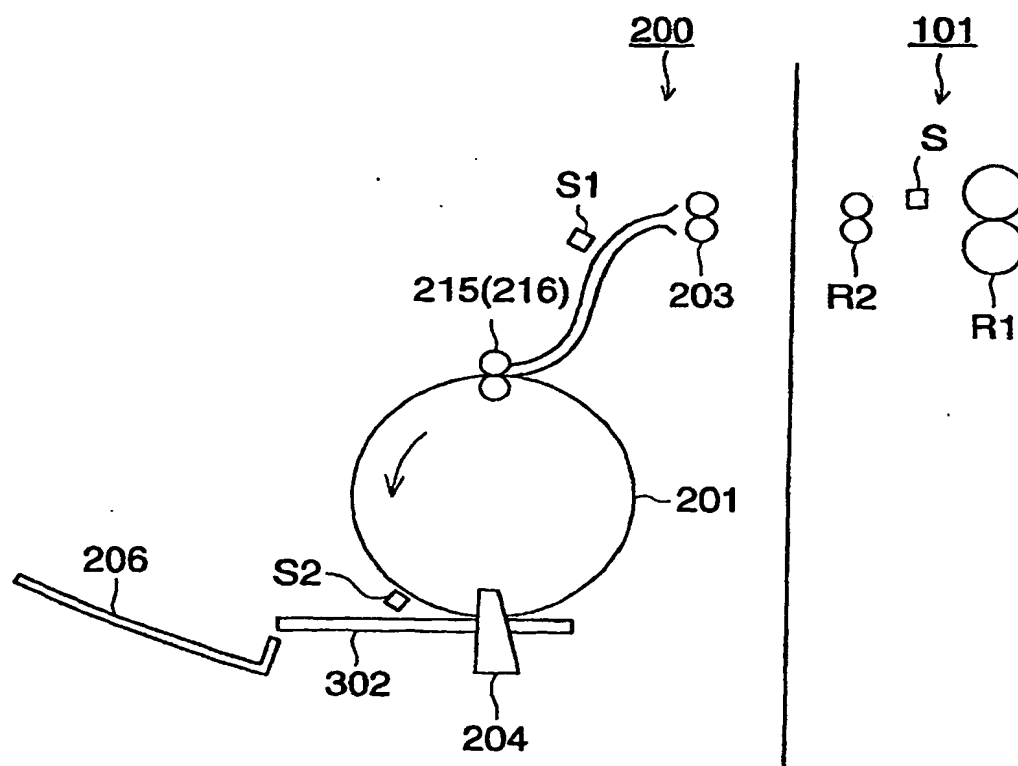
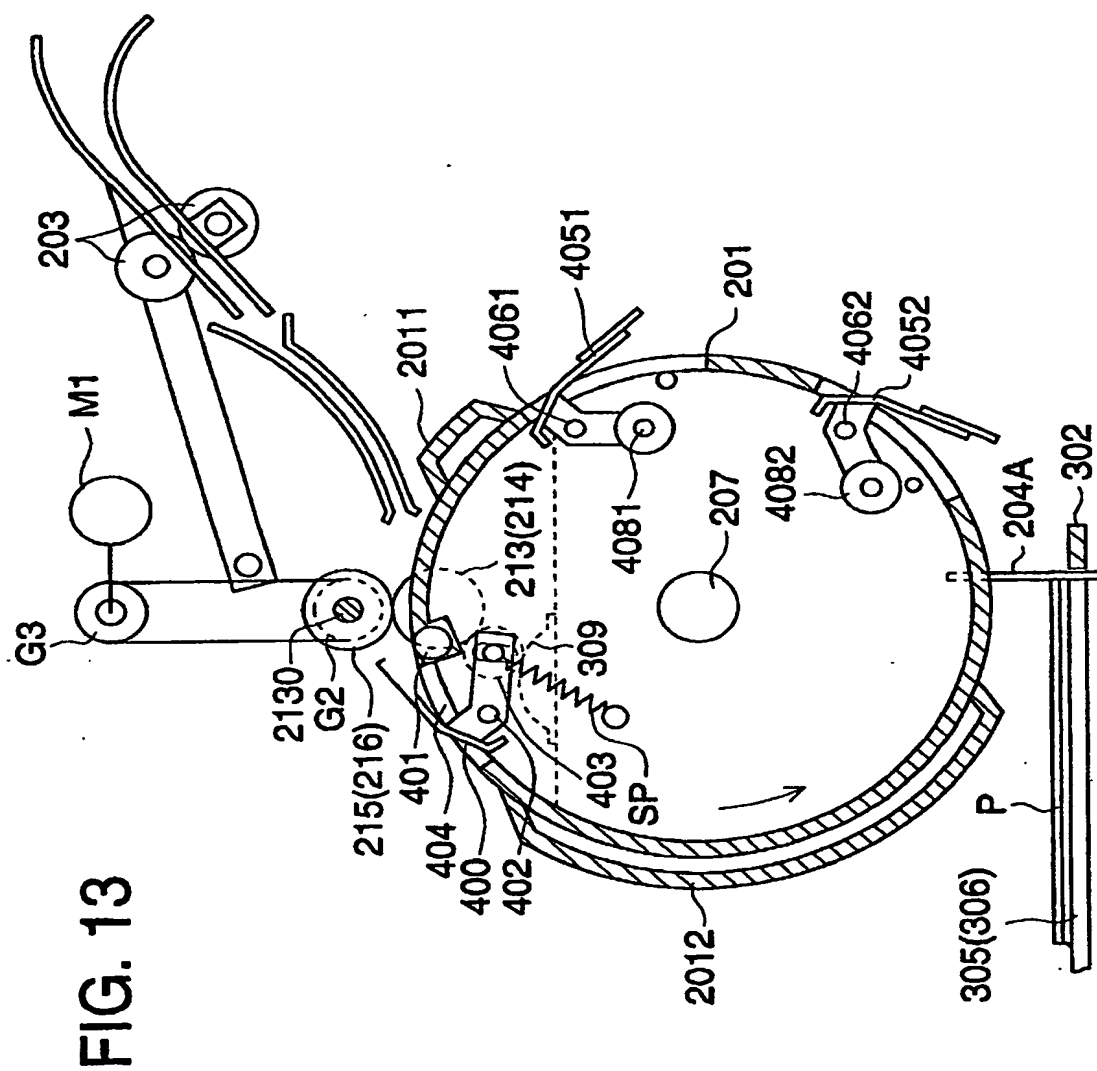


FIG. 12





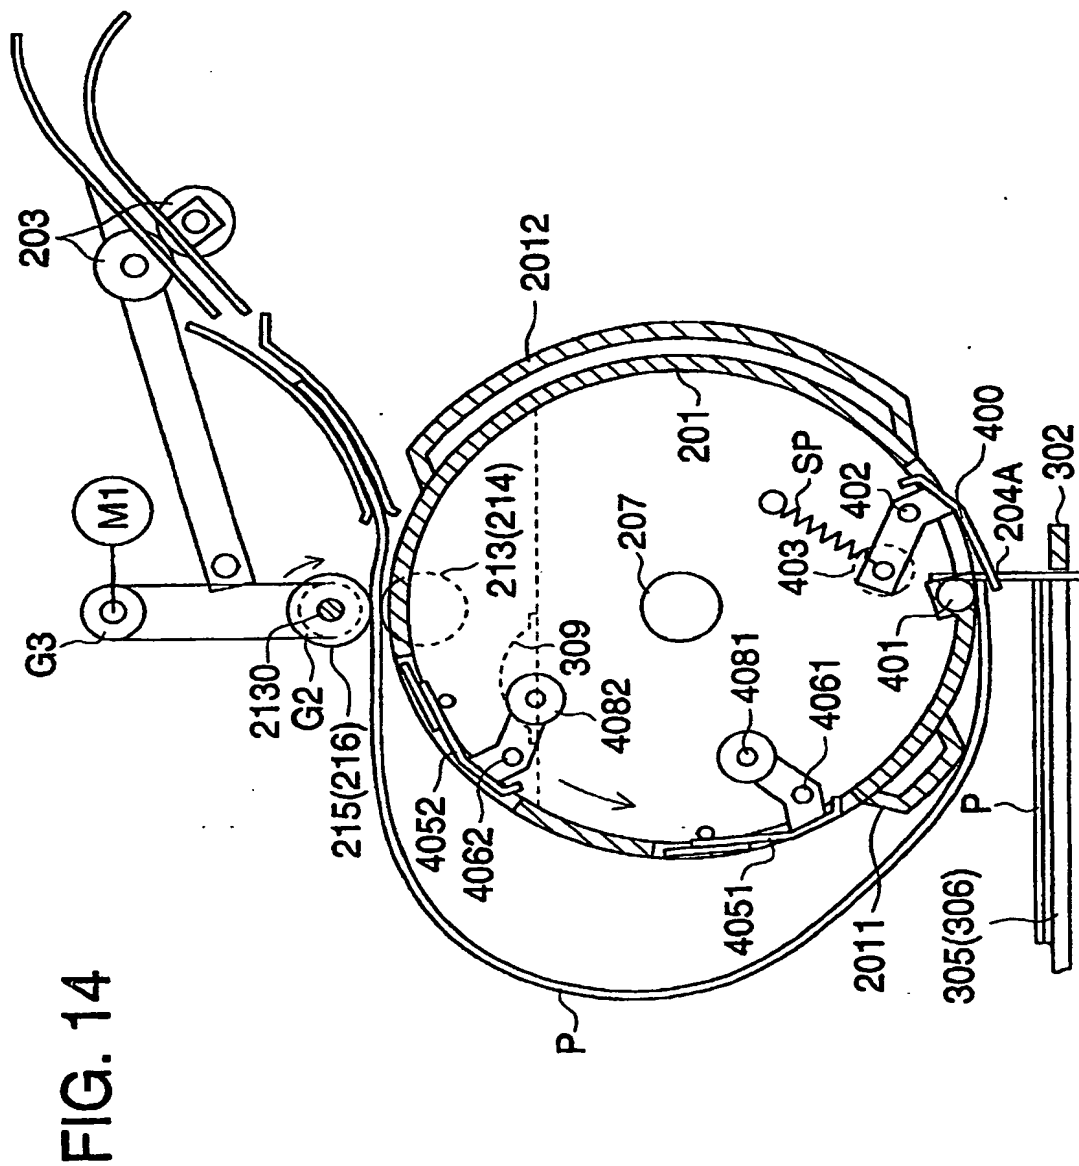




FIG. 15

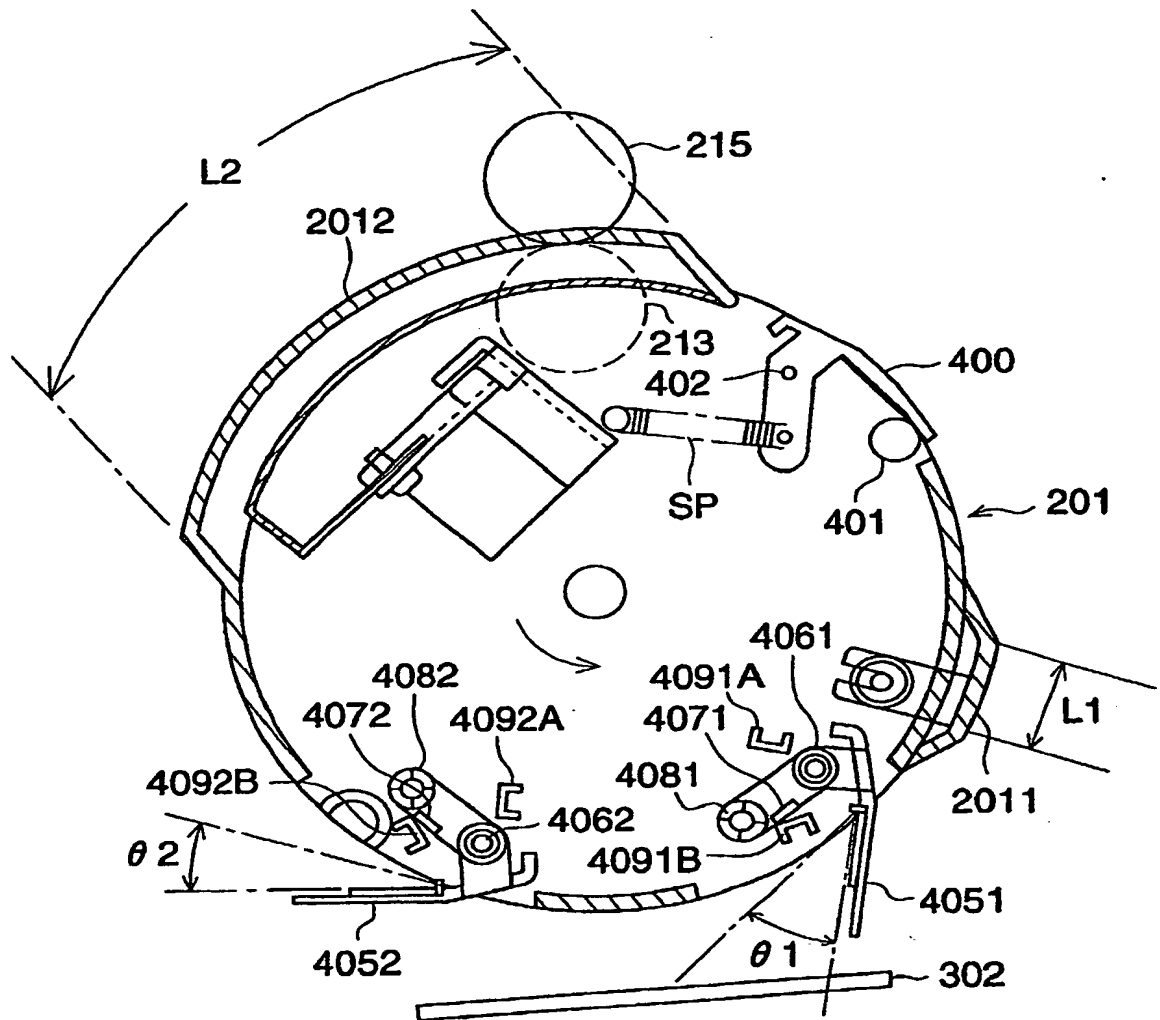


FIG. 16

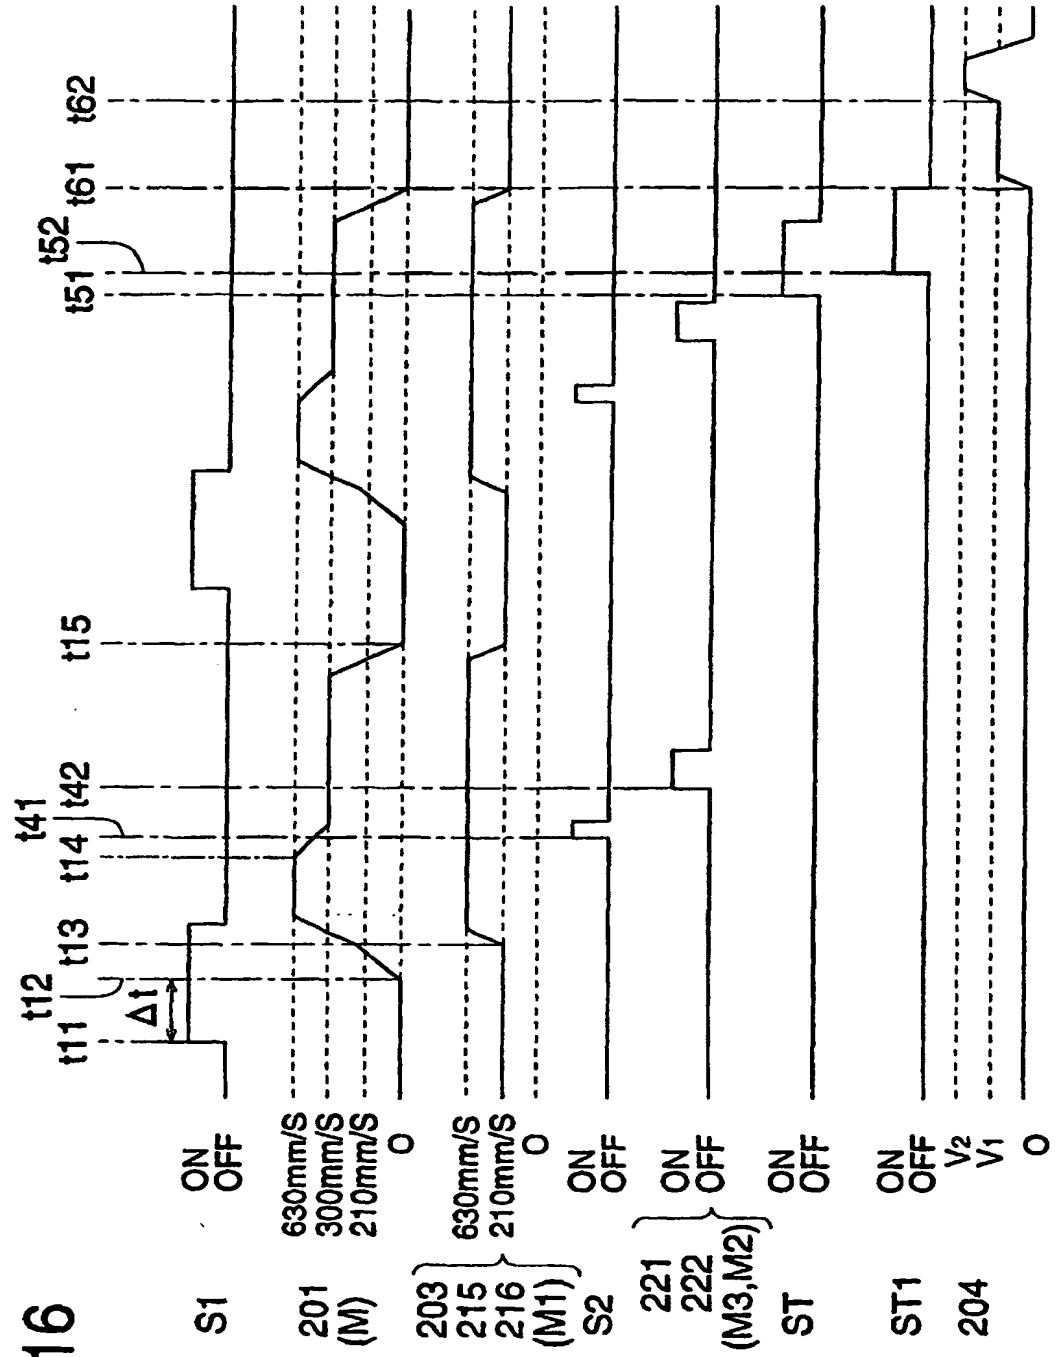


FIG. 17

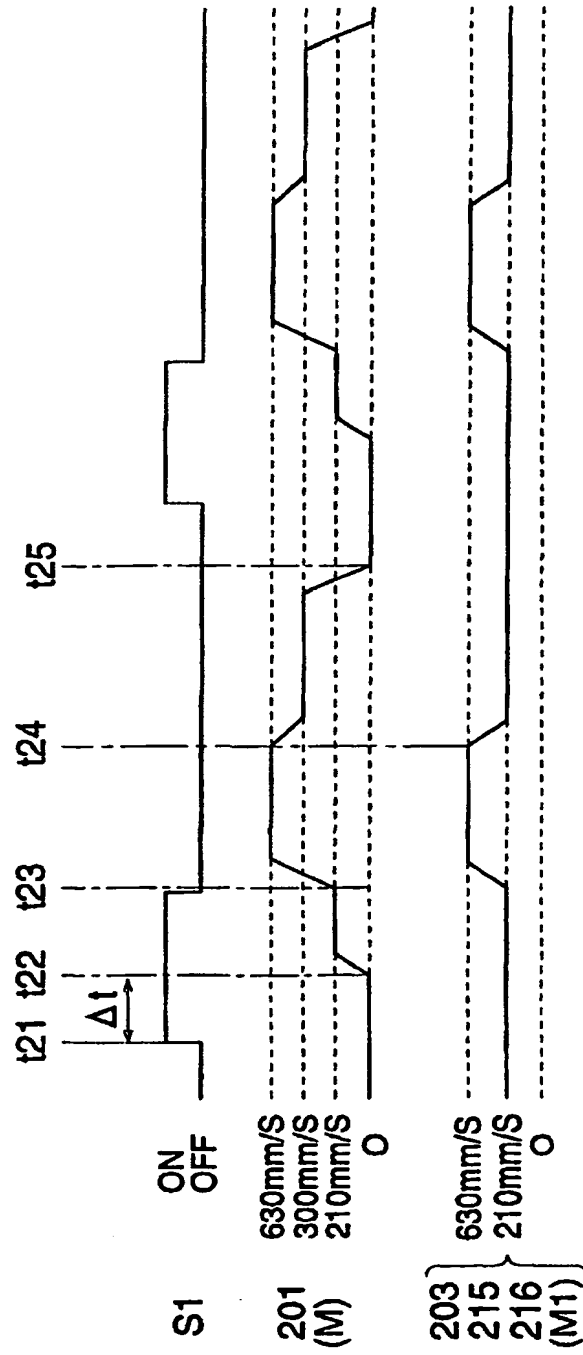


FIG. 18

